

Continuous Combustible Monitoring

For


Boiler Rooms

Electrical Rooms



Single Channel Controller Beacon 110

- Digital readout
- Weather proof NEMA 4X enclosure
- Audible alarm
- Optional strobe & battery backup

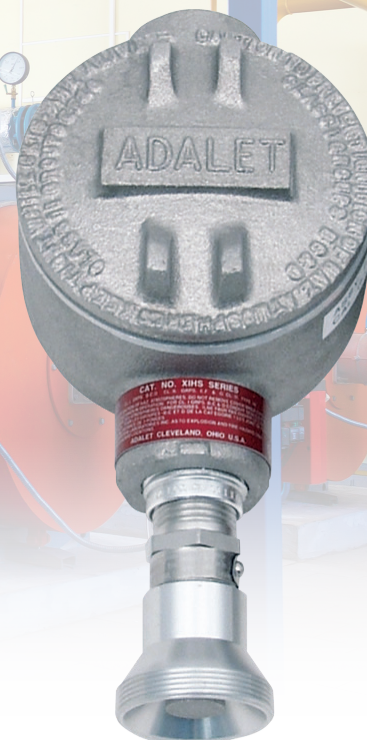


Explosion Proof LEL Direct Connect Sensor

- Monitors LEL, O₂, H₂S, CO, H₂, CO₂, and other toxics
- Remote mount sensor capability
- Explosion proof available
- No transmitter required



RKI Instruments, Inc.
Phone: (800) 754-5165
www.rkiinstruments.com

Anthony Emmolo
16 Mount Bethel Rd, Ste 119
Warren, NJ 07059
Phone: 443 569-4561
Cell: 212 810-0811
anthony@salessolutionsinc.net



Territory Sales Manager

Gas Detection For Life

Personal Gas Monitoring



Show Special
10% off



**Calibration Station
SDM-03**

Single Gas Monitor 03 Series

- 4 Gases to choose from LEL, O₂, CO, or H₂S
- Operates 3,000 hrs. on alkaline batteries
- GP-03 operates 35 hrs Alkaline, 30 hrs Ni-MH
- Removable protective boot
- Pocket size 2.1"(W) x 2.6"(H) x 0.9"(D), 2.8 oz
- Comfortable to wear near breathing zone
- Alligator clip, rotates 360°

- Audible, visual, and vibration alarms
- Peak hold, STEL & TWA readings
- Impact and water resistant
- Intrinsically safe, CSA/C/US, ATEX
- 3 Year warranty, HS-03 & CO-03
- 2 Year warranty, GP-03 & OX-03