
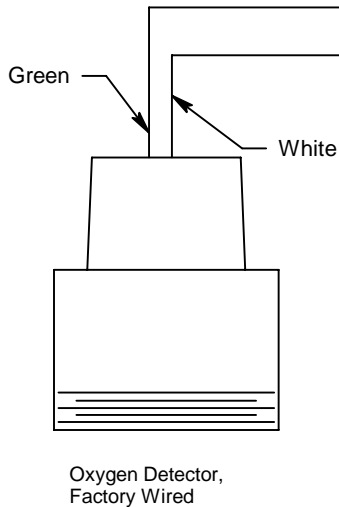



P1	Preliminary Release	5/23/05	
0	Release per ECR 51129-01	12/16/05	

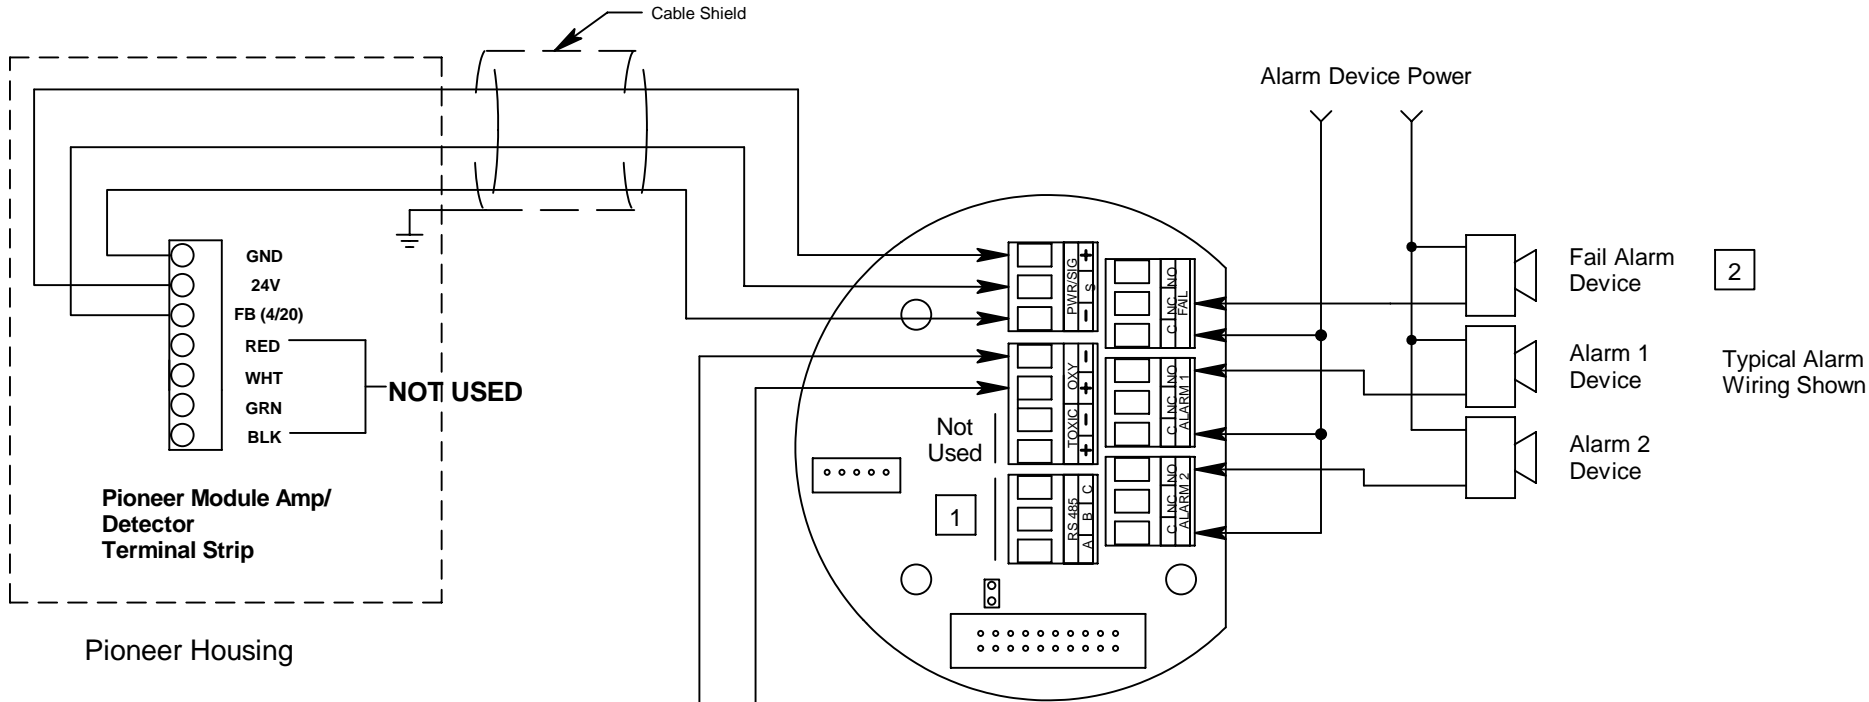

Notes

- 1 See drawing 65-2610RK-R10 for RS-485 wiring.
- 2 Each set of relay contacts rated for 5 amps 250 VAC resistive.

DO NOT SCALE DRAWING		All Dimensions In Inches Unless Otherwise Noted.		<div><div>RKI Instruments, Inc. www.rkiinstruments.com</div></div>	
Deburr	Break Edges .010 R				
Tolerances & Finishes Unless Otherwise Noted: .XX ± .010 Angles ± 0° 30' .XXX ± .005 Conc. .010 TIR Fractions ± .015 Finish <div>125✓</div>		MATERIAL: N/A		TITLE: Wiring Diagram , M2, OXY, Capillary Type, to Pioneer	
Finish for O-ring Grooves, 3 Sides <div>32✓</div>		FINISH: N/A			
SCALE:None		A	DRAWN BY: CW/DJ	PART NUMBER: 65-2613RK-R05	REVISION: 0
		APPROVED BY:		DATE: 5/23/05	PAGE 1 OF 1