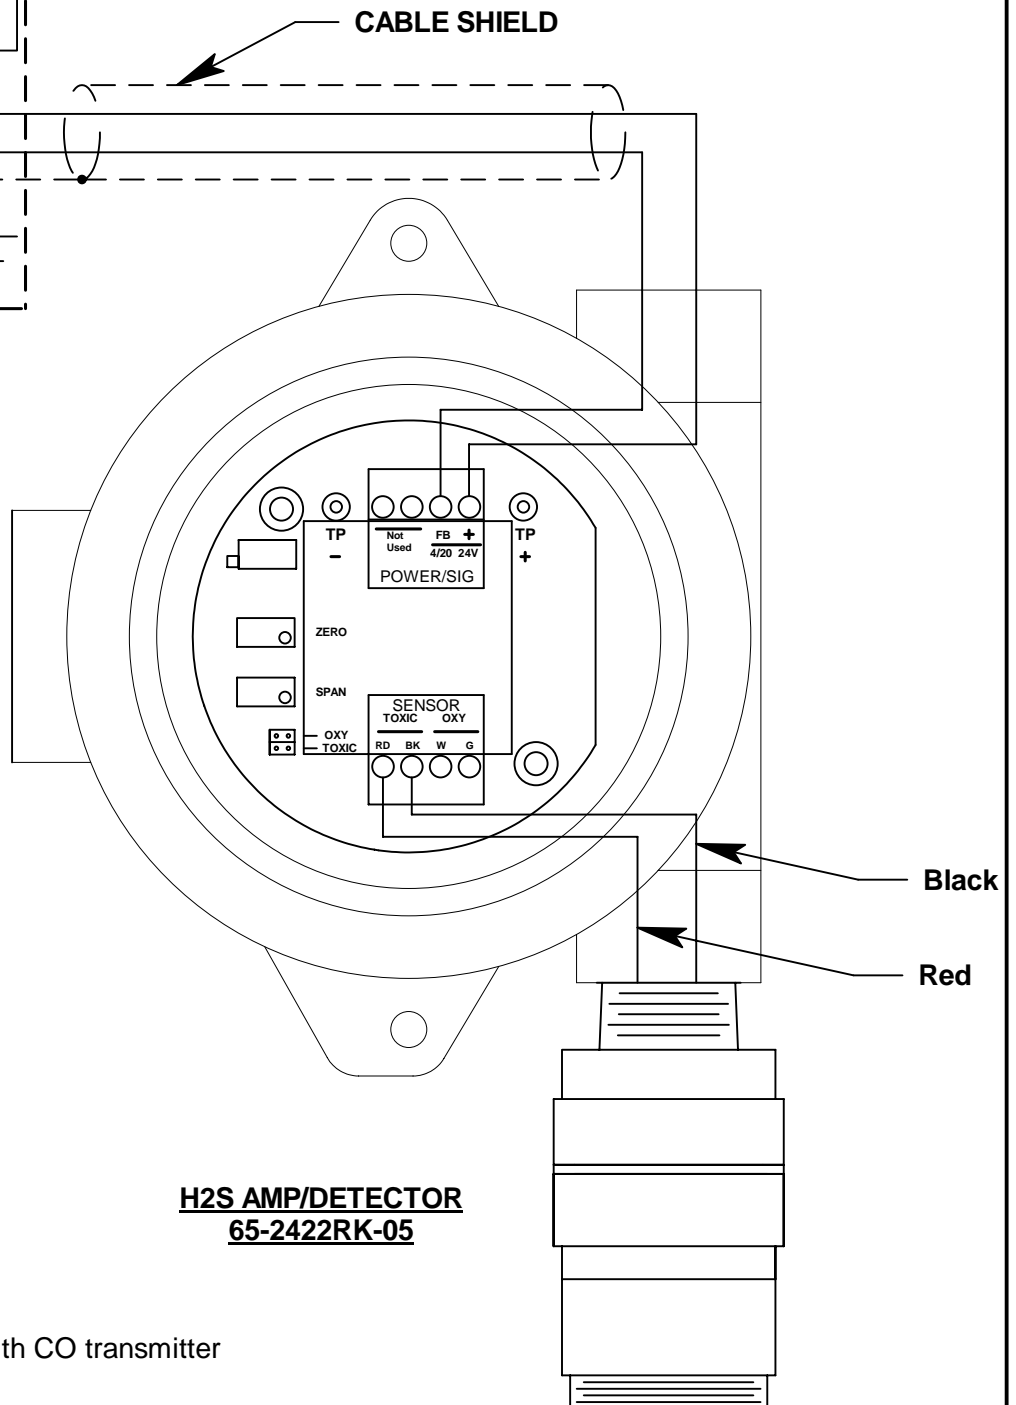

**BEACON 200 HOUSING**

Note:

This drawing may also be used with CO transmitter
65-2432RK-05.

| | | | | | | |
|--|--------------------|---|--|--|---|--|
| DO NOT SCALE DRAWING | | All Dimensions In Inches Unless Otherwise Noted. | | <div>RKI Instruments, Inc. www.rkiinstruments.com</div> | | |
| Deburr | Break Edges .010 R | | | | | |
| Tolerances & Finishes Unless Otherwise Noted: .XX ± .010 Angles ± 0° 30' .XXX ± .005 Conc. .010 TIR Fractions ± .015 Finish <div><div>125</div><div>✓</div></div> | | MATERIAL: N/A | | TITLE: WIRING DIAGRAM, 65-2422RK-05 TO BEACON 200 | | |
| FINISH: N/A | | | | | | |
| Finish for O-ring Grooves, 3 Sides <div><div>32</div><div>✓</div></div> | | SCALE: NONE | | <div><div>A</div><div>DRAWN BY: GD</div></div> | <div><div>PART NUMBER: 65-2422RK-05-R03</div></div> | <div><div>REVISION: P1</div></div> |
| | | APPROVED BY: | | DATE: 05/08/06 | PAGE 1 OF 1 | |