


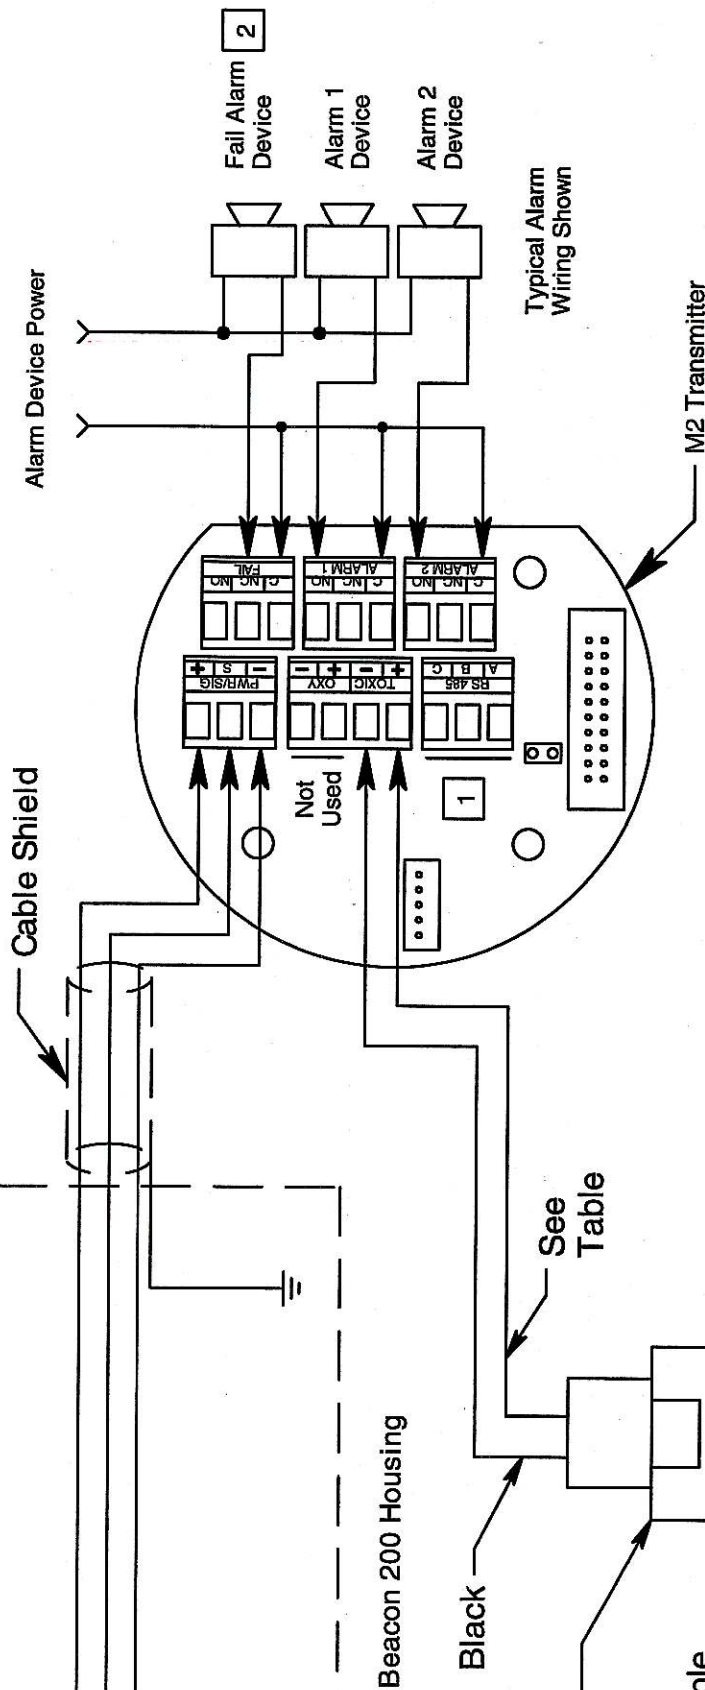
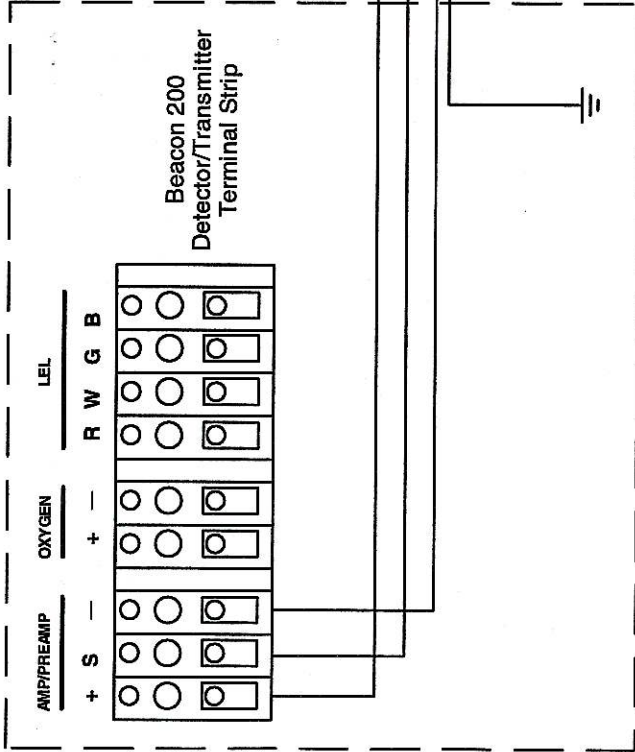


P1	Preliminary Release	1/23/08	
0	Released per ECR 080603-01	6/16/08	
A	ECR 090630-01	7/14/09	





Gas Type	+ Wire
AsH3	brown
Cl2	yellow
HCN	white
NH3	red
NO	orange
PH3	green
SO2	blue

#### Notes

- See drawing 65-2610RK-R10 for RS-485 wiring.
- Each set of relay contacts rated for 5 amps 250 VAC resistive.

**MASTER**

 <b>RKI Instruments, Inc.</b> www.rkiinstruments.com		<b>TITLE: Wiring Diagram, M2, ESM-01 to Beacon 200</b>	
<b>DO NOT SCALE DRAWING</b> Debur   Break Edges .010 R Tolerances & Finishes Unless Otherwise Noted: .XX ± .010 Angles ± 0° 30' .XXX ± .005 Conc. .010 TIR Fractions ± .015 Finish 125/32 Finish for O-ring Grooves, 3 Sides	All Dimensions in Inches Unless Otherwise Noted. MATERIAL: N/A FINISH: N/A	<b>A</b> DRAWN BY: CW/DJ PART NUMBER: 65-2618RK-R03	REVISION: A DATE: 1/23/08
APPROVED BY: 		SCALE: None	
		PAGE 1 OF 1	