



P1	Preliminary Release	2/6/06	
P2	See PDC 60321-01	3/22/06	

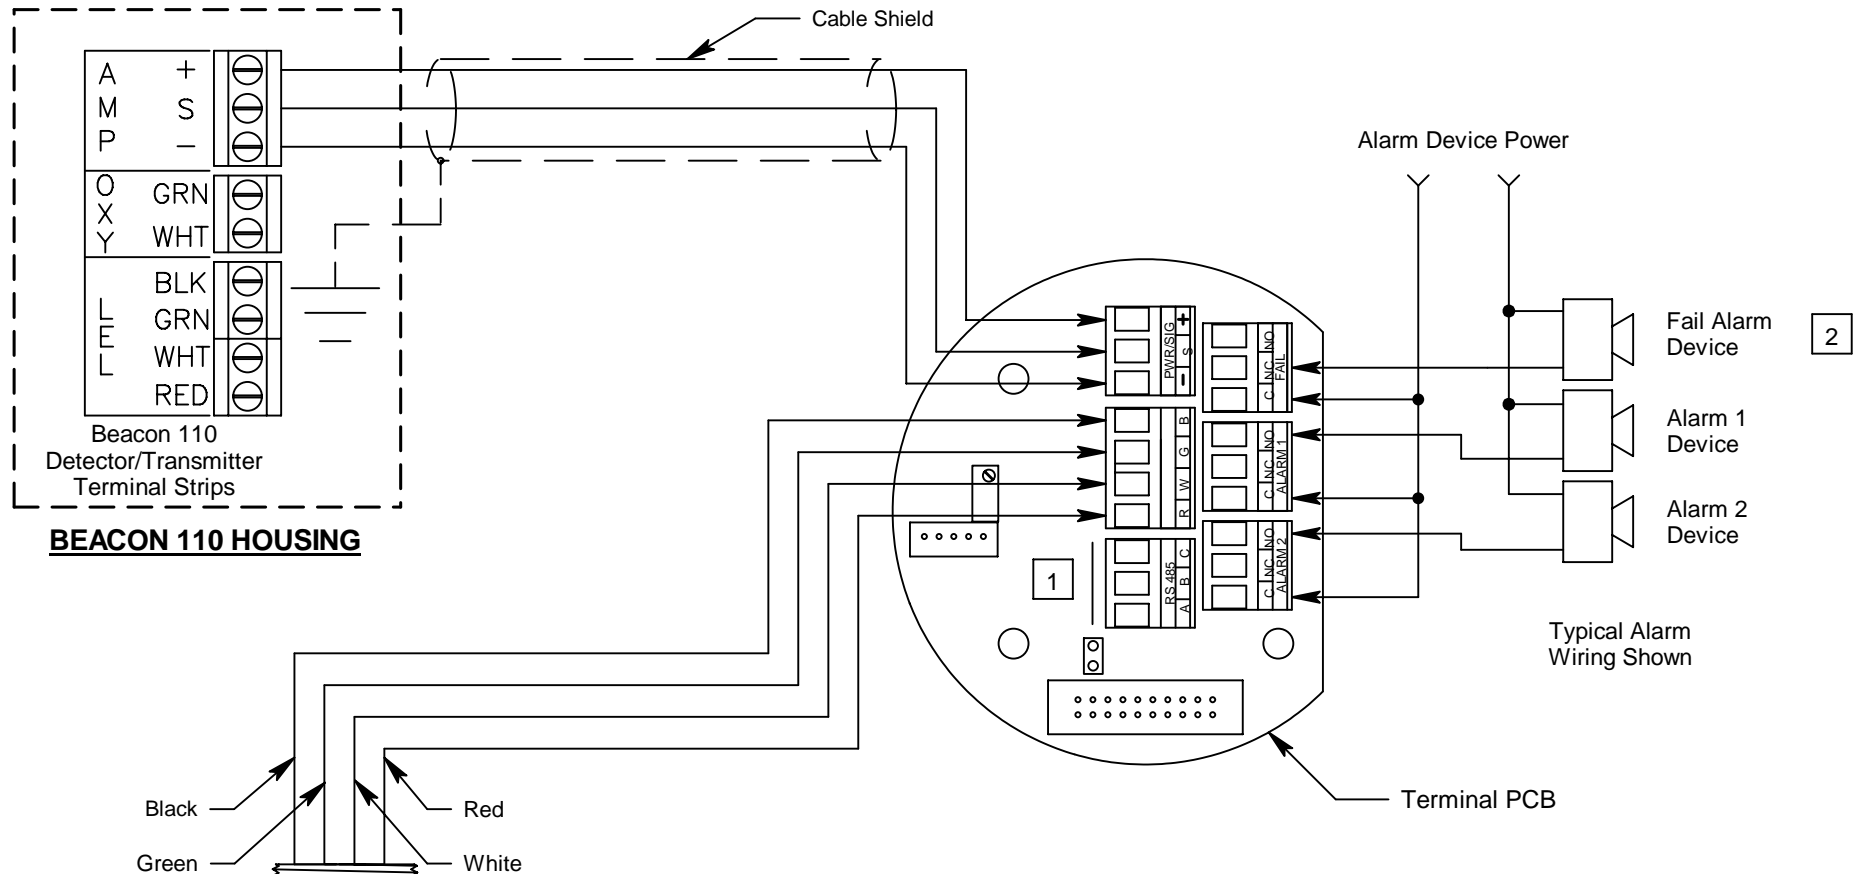

#### Notes

- 1 See drawing 65-2610RK-R10 for RS-485 wiring.
- 2 Each set of relay contacts rated for 5 amps 250 VAC resistive.

DO NOT SCALE DRAWING		All Dimensions In Inches Unless Otherwise Noted.			RKI Instruments, Inc. www.rkiinstruments.com		
Deburr	Break Edges .010 R						
Tolerances & Finishes Unless Otherwise Noted: .XX ± .010      Angles ± 0° 30' .XXX ± .005      Conc. .010 TIR Fractions ± .015      Finish 125/32		MATERIAL: N/A		TITLE: Wiring Diagram , M2, IR LEL HC to Beacon 110			
		FINISH: N/A					
Finish for O-ring Grooves, 3 Sides 32/✓		SCALE:None		A DRAWN BY: KMP		PART NUMBER: 65-2619RK-HC-R02	REVISION: P2
				APPROVED BY:		DATE: 2/6/06	PAGE 1 OF 1