



P1	Preliminary Release	2/6/06	
P2	See PDC 60321-01	3/22/06	

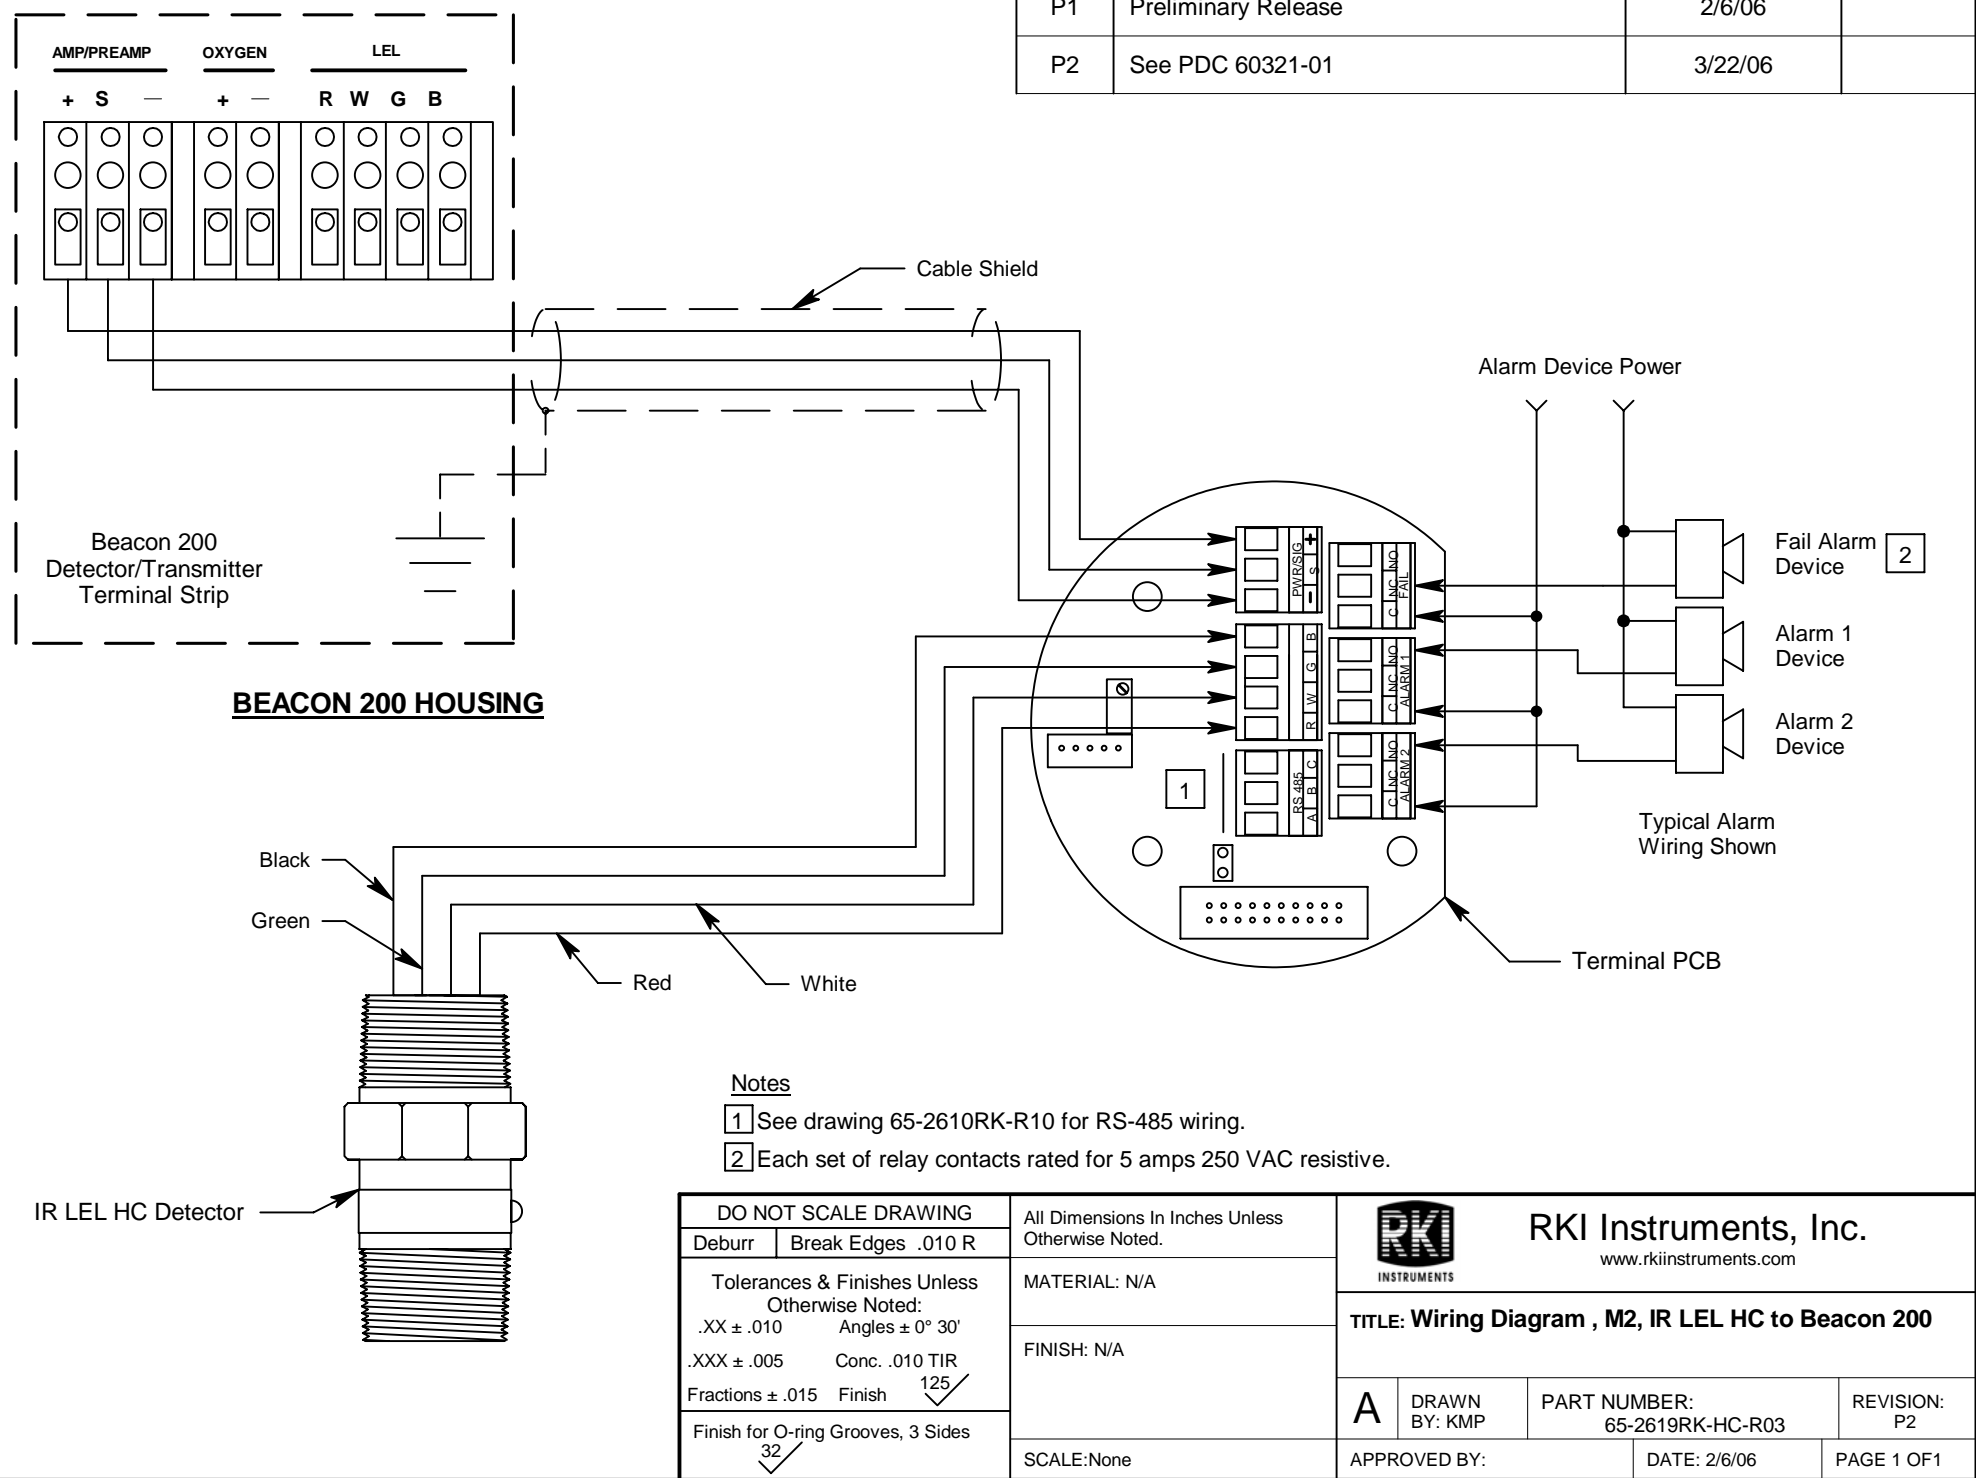

BEACON 200 HOUSING

Notes

- 1 See drawing 65-2610RK-R10 for RS-485 wiring.
- 2 Each set of relay contacts rated for 5 amps 250 VAC resistive.

DO NOT SCALE DRAWING		All Dimensions In Inches Unless Otherwise Noted.		<div></div> <div>RKI Instruments, Inc.</div> <div>www.rkiinstruments.com</div>	
Deburr	Break Edges .010 R				
Tolerances & Finishes Unless Otherwise Noted: .XX ± .010 Angles ± 0° 30' .XXX ± .005 Conc. .010 TIR Fractions ± .015 Finish <div>125✓</div>		MATERIAL: N/A		TITLE: Wiring Diagram , M2, IR LEL HC to Beacon 200	
Finish for O-ring Grooves, 3 Sides <div>32✓</div>		FINISH: N/A			
SCALE:None		APPROVED BY:		PART NUMBER: 65-2619RK-HC-R03	
				REVISION: P2	
				DATE: 2/6/06	
				PAGE 1 OF 1	