



P1	Preliminary Release	1/11/06	
0	Released per ECR 60321-02	04/26/06	

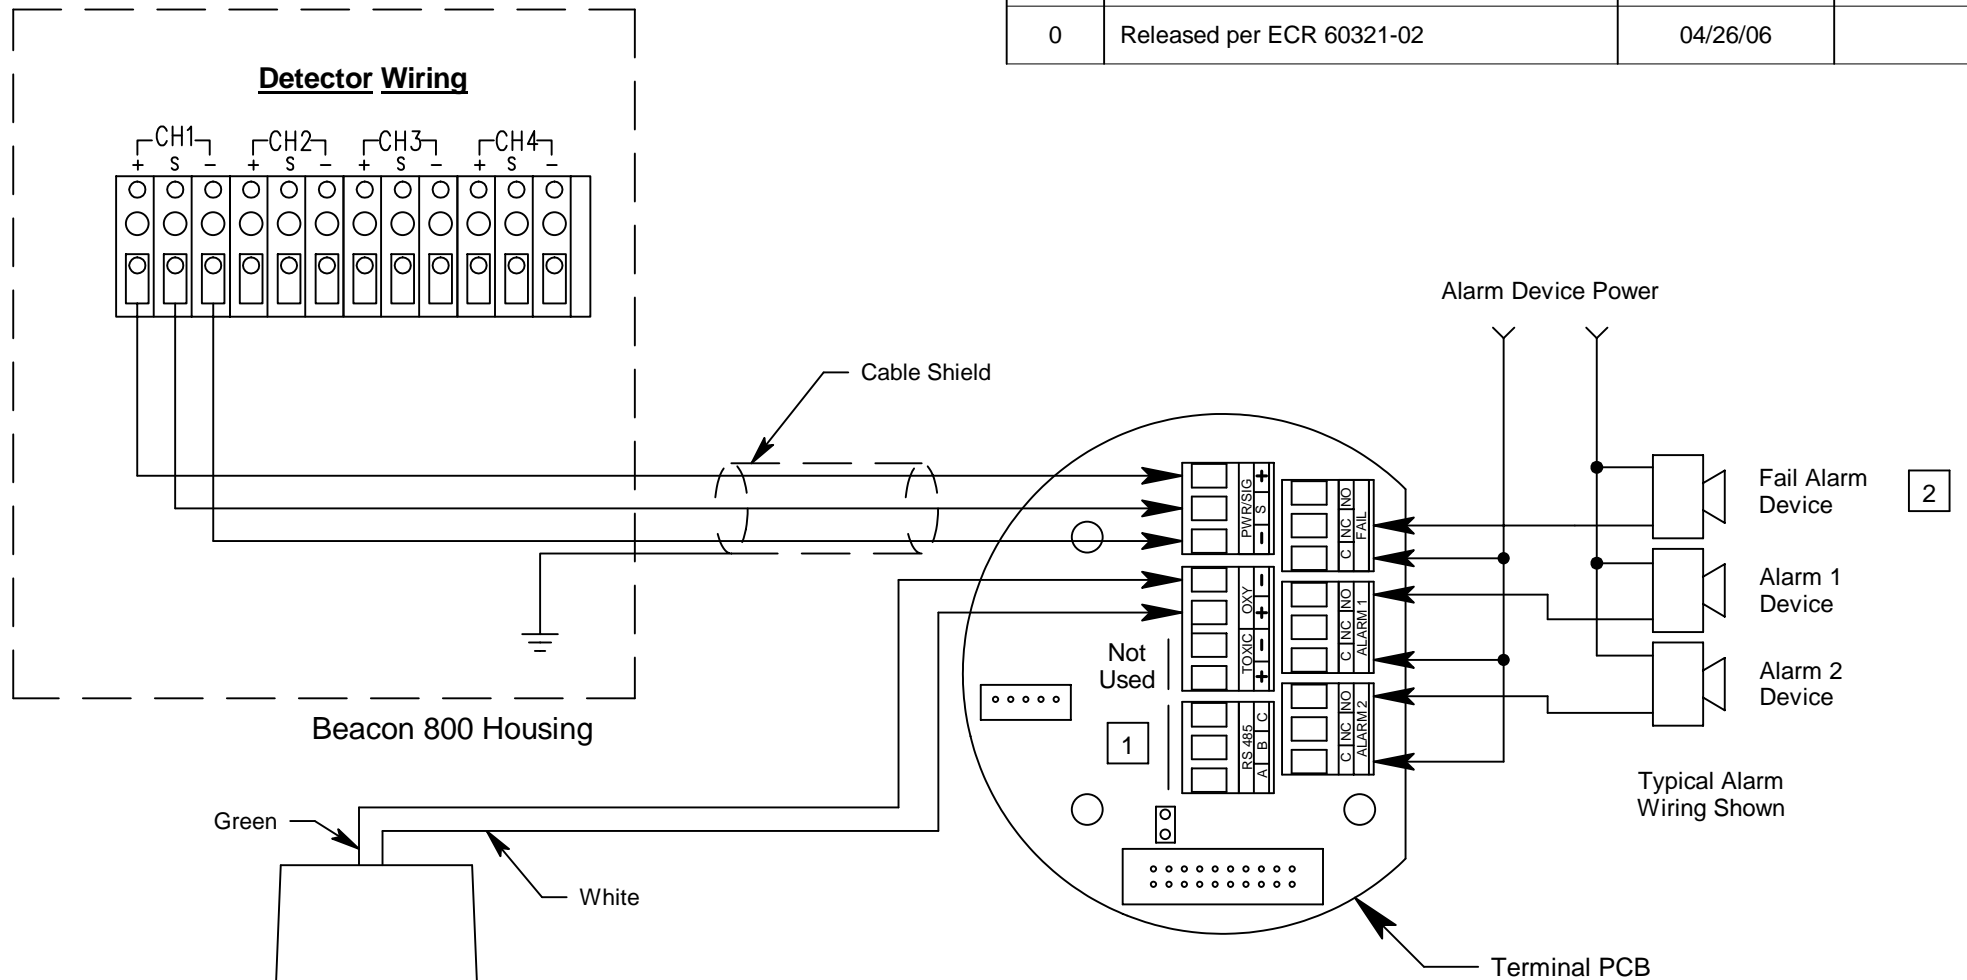

Notes

- 1 See drawing 65-2610RK-R10 for RS-485 wiring.
- 2 Each set of relay contacts rated for 5 amps 250 VAC resistive.

Oxygen Detector,
Factory Wired

DO NOT SCALE DRAWING		All Dimensions In Inches Unless Otherwise Noted.		<div> INSTRUMENTS</div> <div>RKI Instruments, Inc. www.rkiinstruments.com</div>		
Deburr	Break Edges .010 R					
Tolerances & Finishes Unless Otherwise Noted: .XX ± .010 Angles ± 0° 30' .XXX ± .005 Conc. .010 TIR Fractions ± .015 Finish 125✓		MATERIAL: N/A		TITLE: Wiring Diagram , M2, OXY, Capillary Type, to Beacon 800, CSA Version		
Finish for O-ring Grooves, 3 Sides 32✓		FINISH: N/A				
SCALE:None		A		DRAWN BY: GD	PART NUMBER: 65-2613RK-05-R04	REVISION: 0
		APPROVED BY:		DATE: 1/11/06		PAGE 1 OF 1