



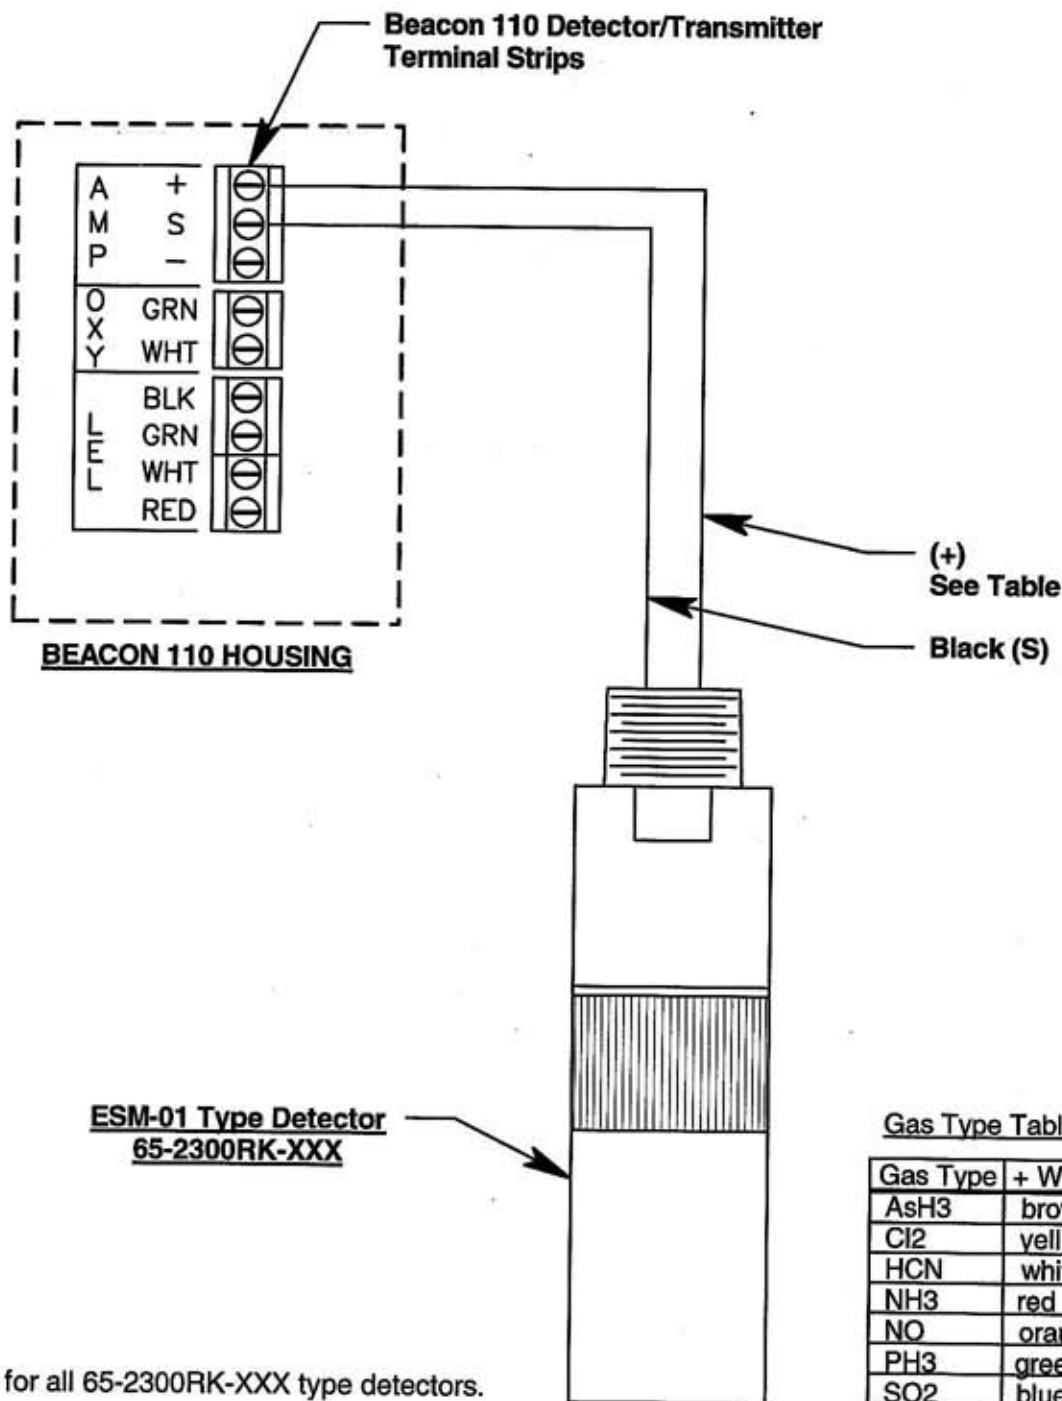


P1	PRELIMINARY RELEASE	09/07/2007	
P2	PDC 080129-01	01/31/2008	
0	Released per ECR 080603-01	06/13/2008	
A	ECR 090630-01	07/14/2009	



**Note:**  
This drawing is used for all 65-2300RK-XXX type detectors.

**PROPRIETARY  
AND CONFIDENTIAL**

The information contained in this drawing is the sole property of RKI Instruments.  
Any reproduction in part or as a whole without the written permission of RKI Instruments is prohibited.

**DO NOT SCALE DRAWING**

Deburr Break Edges .010 R  
Tolerances & Finishes Unless Otherwise Noted:  
.XX ± .010 Angles ± 0° 30'  
.XXX ± .005 Conc. .010 TIR  
Fractions ± .015 Finish 125✓  
Finish for O-ring Grooves, 3 Sides 32✓

All Dimensions In Inches Unless Otherwise Noted.

**MATERIAL: N/A**

**FINISH: N/A**

**SCALE: NONE**




**RKI Instruments, Inc.**

www.rkiinstruments.com

**TITLE: WIRING DIAGRAM, 65-2300RK-XXX TO  
BEACON 110**

**A** DRAWN BY: GD PART NUMBER: 65-2300RK-R03 REVISION: A

APPROVED BY:  DATE: 09/07/07 PAGE 1 OF 1