


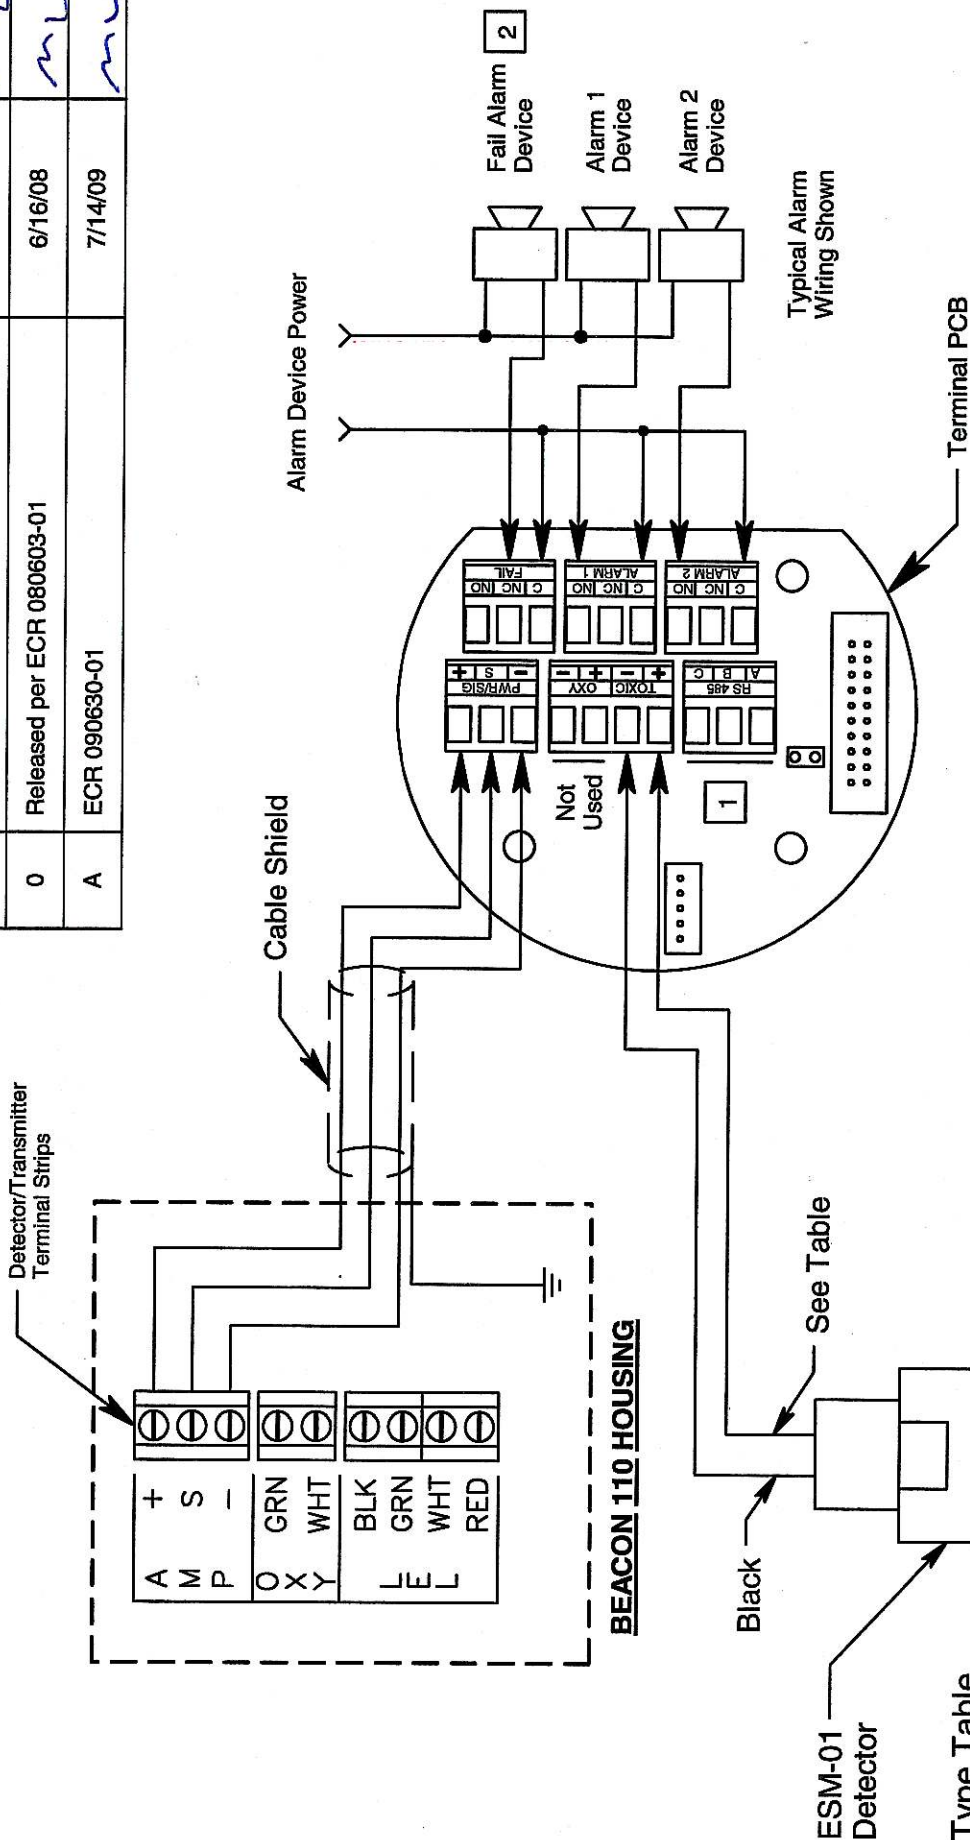




P1	Preliminary Release	1/23/08	
0	Released per ECR 080603-01	6/16/08	
A	ECR 090630-01	7/14/09	



Notes

- See drawing 65-2610RK-R10 for RS-485 wiring.
- Each set of relay contacts rated for 5 amps 250 VAC resistive.

MASTER

 RKI Instruments, Inc. www.rkiinstruments.com		TITLE: Wiring Diagram, M2, ESM-01 to Beacon 110	
DO NOT SCALE DRAWING Debur Break Edges .010 R Tolerances & Finishes Unless Otherwise Noted: .XX ± .010 Angles ± 0° 30' .XXX ± .005 Conc. .010 TIR 125° Fractions ± .015 Finish 32	All Dimensions In Inches Unless Otherwise Noted. MATERIAL: N/A FINISH: N/A	A DRAWN BY: GD/DJ PART NUMBER: 65-2618RK-R08	REVISION: A APPROVED BY:  DATE: 1/23/08
SCALE: None		PAGE 1 OF 1	