
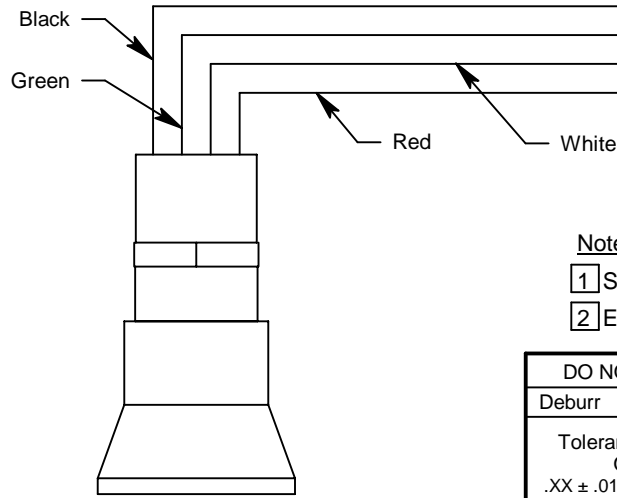



P1	Preliminary Release	8/19/05	
0	Released per ECR 51129-01	12/16/05	

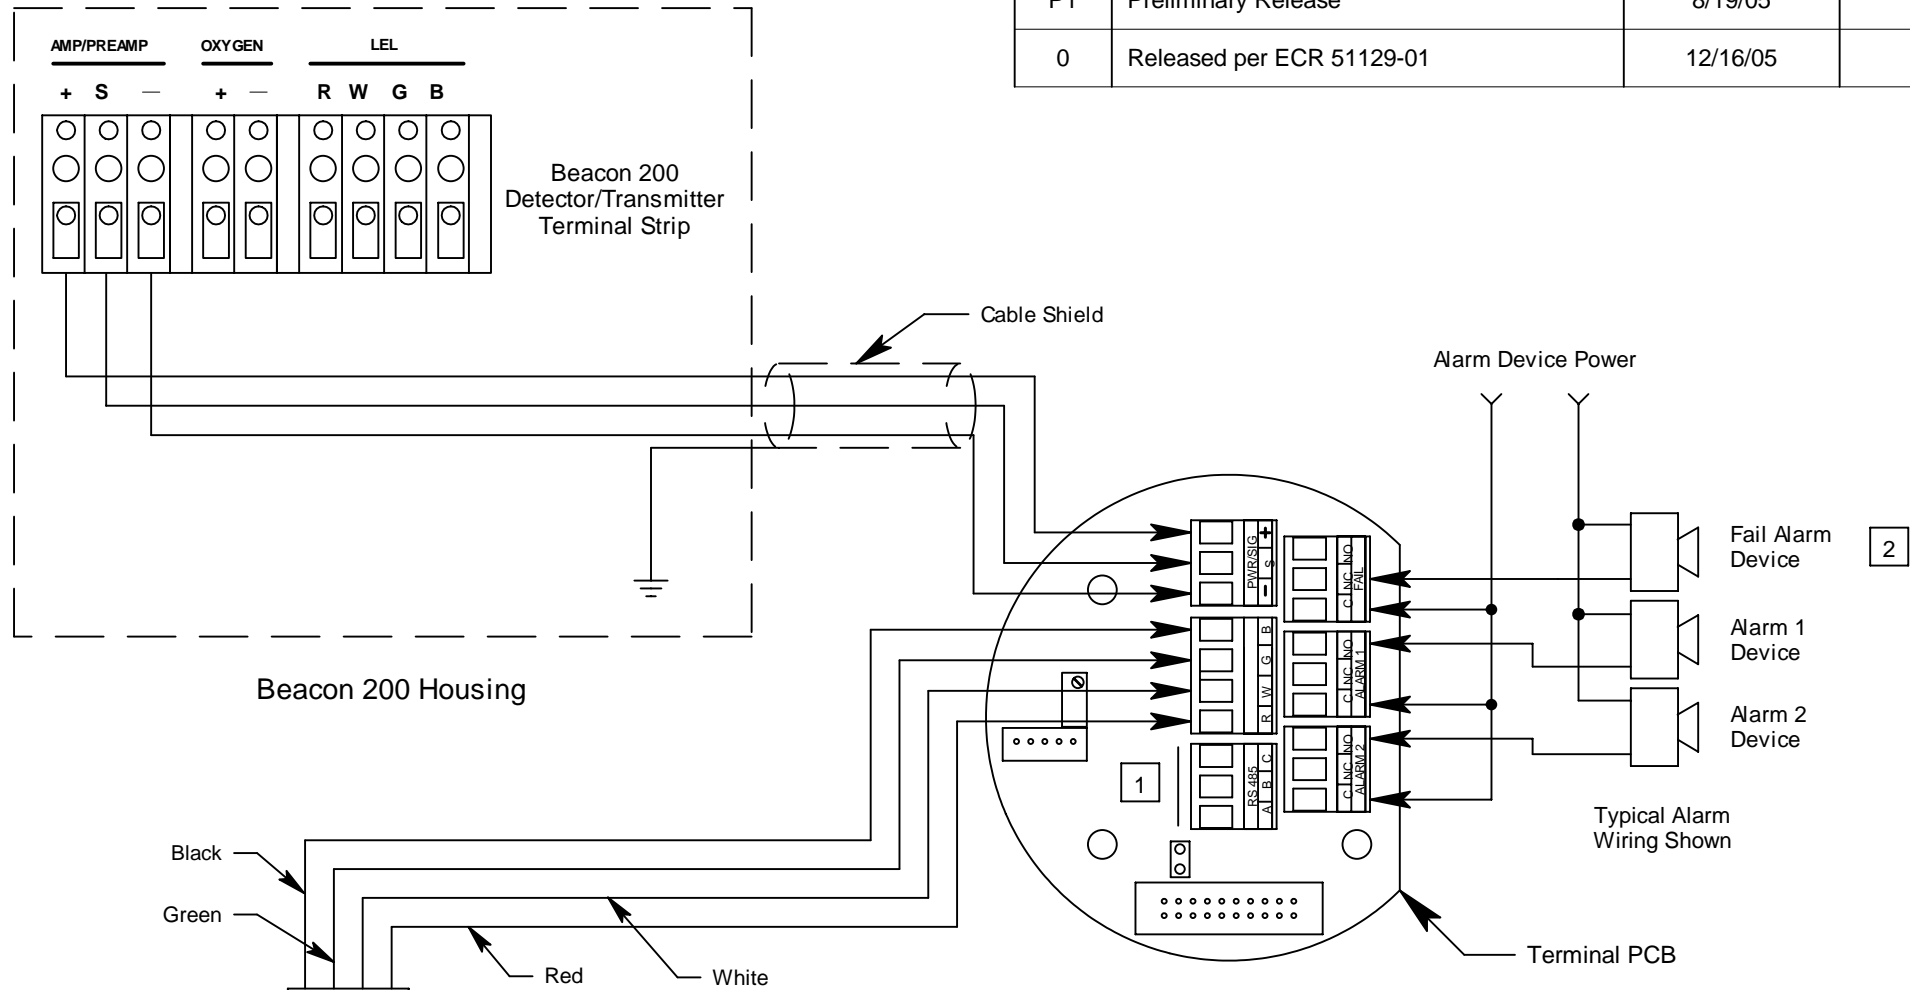

#### Notes

- 1 See drawing 65-2610RK-R10 for RS-485 wiring.
- 2 Each set of relay contacts rated for 5 amps 250 VAC resistive.

DO NOT SCALE DRAWING		All Dimensions In Inches Unless Otherwise Noted.		<div><div>RKI Instruments, Inc. www.rkiinstruments.com</div></div>	
Deburr	Break Edges .010 R				
Tolerances & Finishes Unless Otherwise Noted: .XX ± .010      Angles ± 0° 30' .XXX ± .005      Conc. .010 TIR Fractions ± .015      Finish <div>125</div>		MATERIAL: N/A		<b>TITLE: Wiring Diagram , M2, H2 Specific LEL to Beacon 200</b>	
Finish for O-ring Grooves, 3 Sides <div>32</div>		FINISH: N/A			
SCALE:None		APPROVED BY:		DATE: 8/19/05	
		A		DRAWN BY: CW /DJ	
		PART NUMBER: 65-2611RK-R03		REVISION: 0	
				PAGE 1 OF 1	