



P1	Preliminary Release	11/23/05	
0	Release per ECR 51129-01	12/16/05	

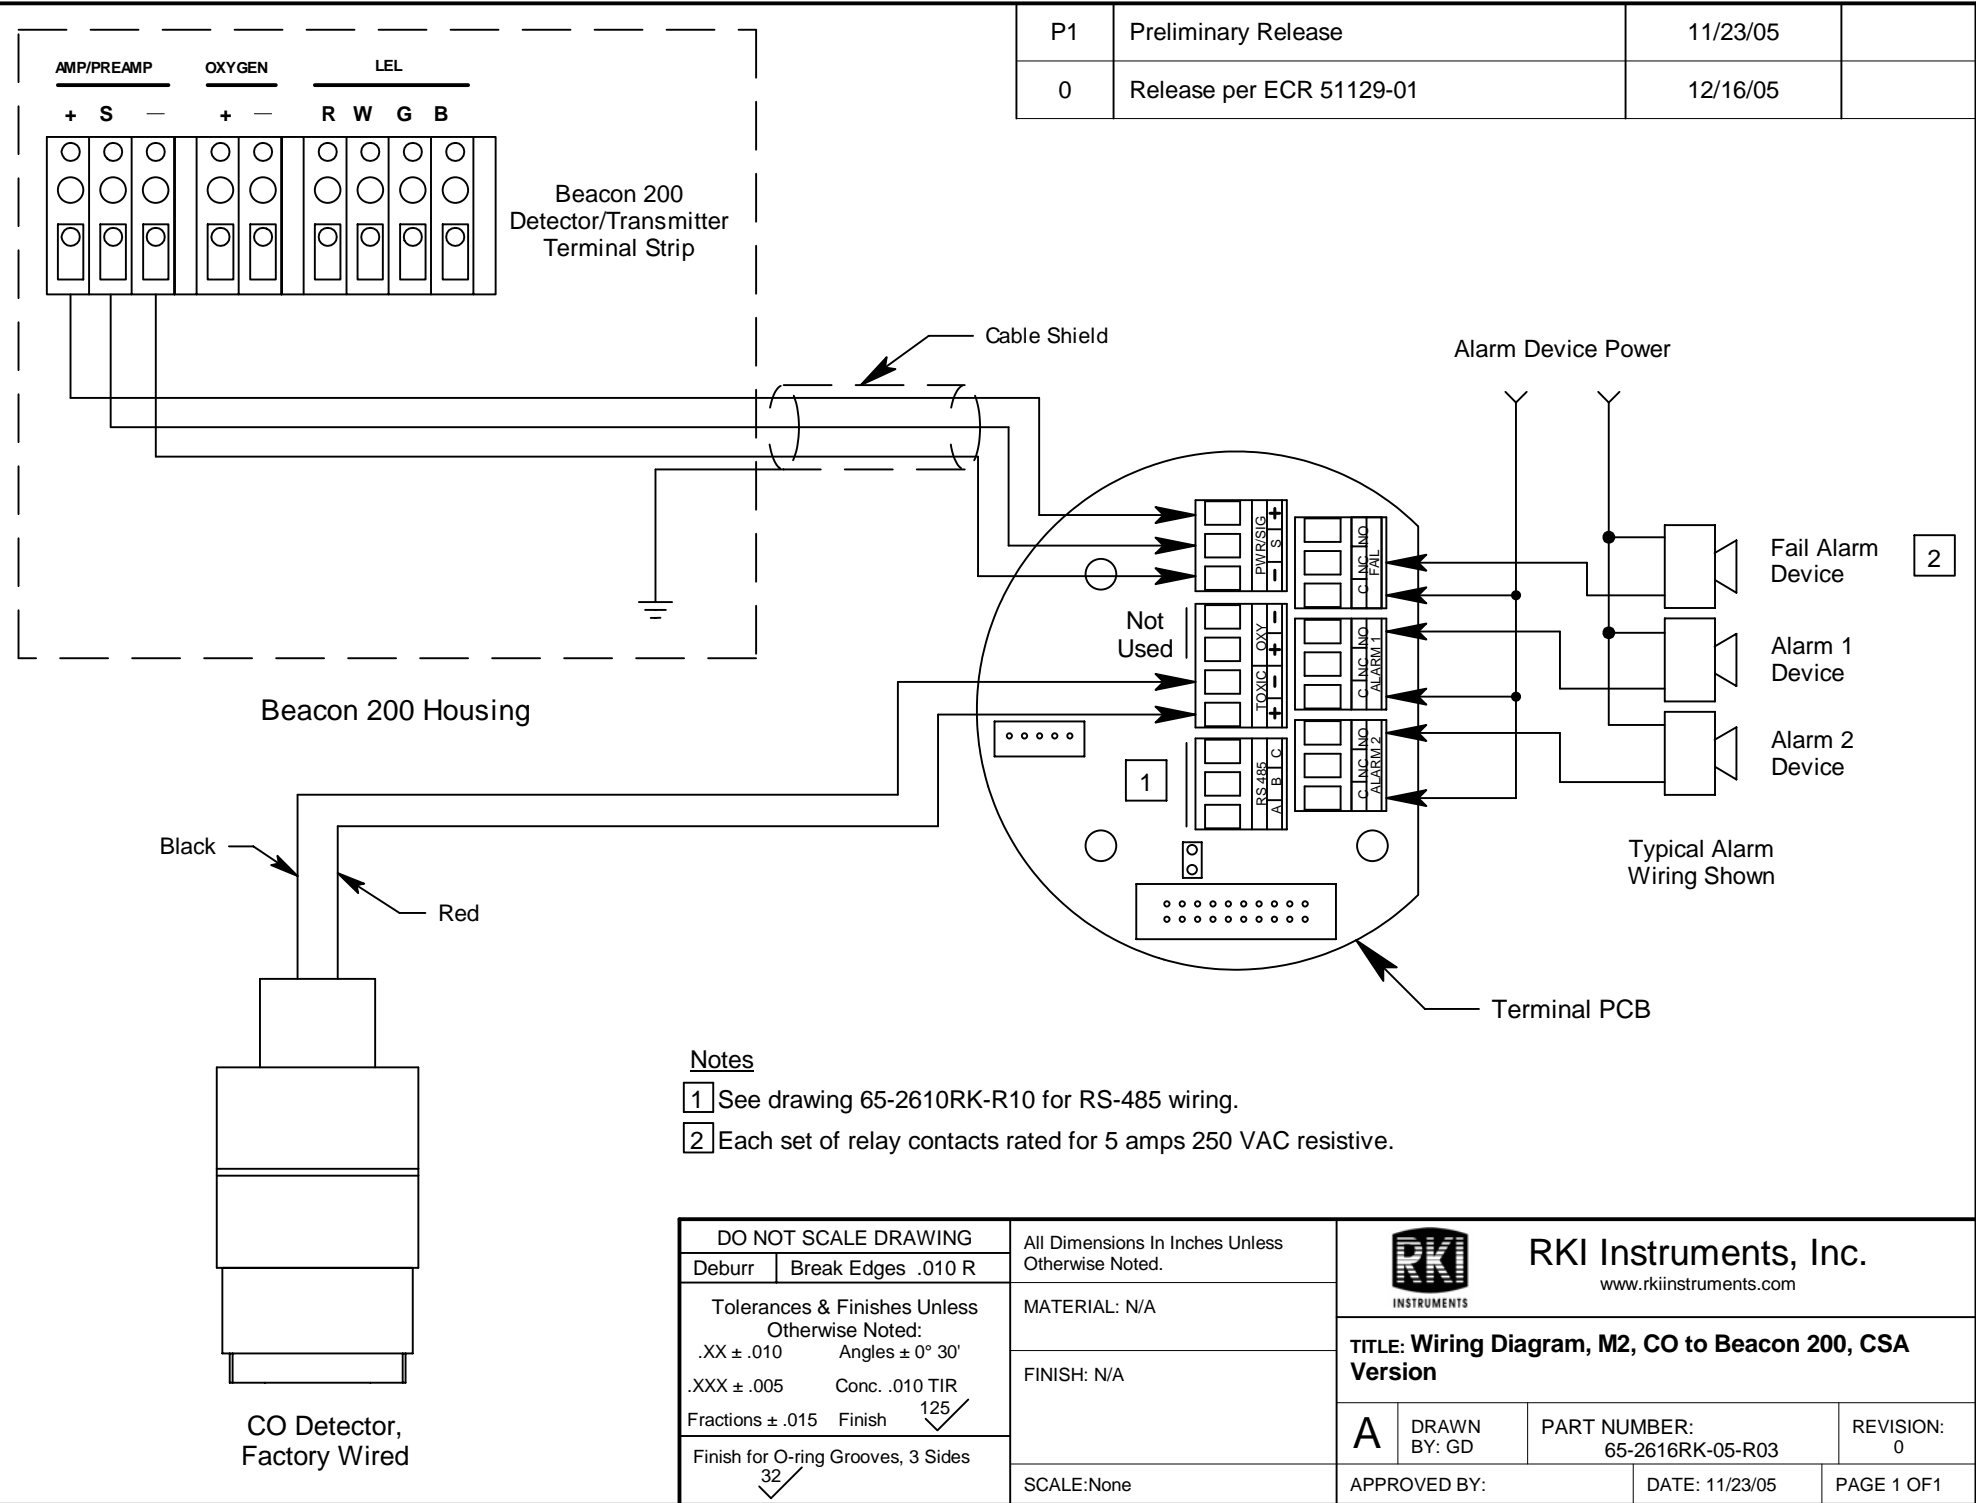

Notes

- 1 See drawing 65-2610RK-R10 for RS-485 wiring.
- 2 Each set of relay contacts rated for 5 amps 250 VAC resistive.

DO NOT SCALE DRAWING		All Dimensions In Inches Unless Otherwise Noted.		<div> INSTRUMENTS</div> <div>RKI Instruments, Inc. www.rkiinstruments.com</div>	
Deburr	Break Edges .010 R				
Tolerances & Finishes Unless Otherwise Noted: .XX ± .010 Angles ± 0° 30' .XXX ± .005 Conc. .010 TIR Fractions ± .015 Finish <div><div>125</div><div>✓</div></div>		MATERIAL: N/A		TITLE: Wiring Diagram, M2, CO to Beacon 200, CSA Version	
Finish for O-ring Grooves, 3 Sides <div><div>32</div><div>✓</div></div>		FINISH: N/A			
SCALE:None		APPROVED BY:		PART NUMBER: 65-2616RK-05-R03	
				REVISION: 0	
				DATE: 11/23/05	
				PAGE 1 OF 1	