
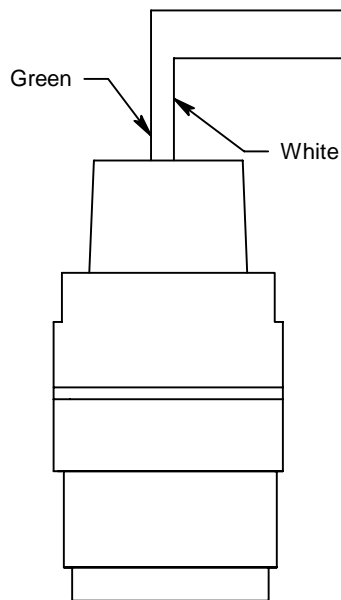



P1	Preliminary Release	1/11/06	
0	Released per ECR 60321-02	04/26/06	

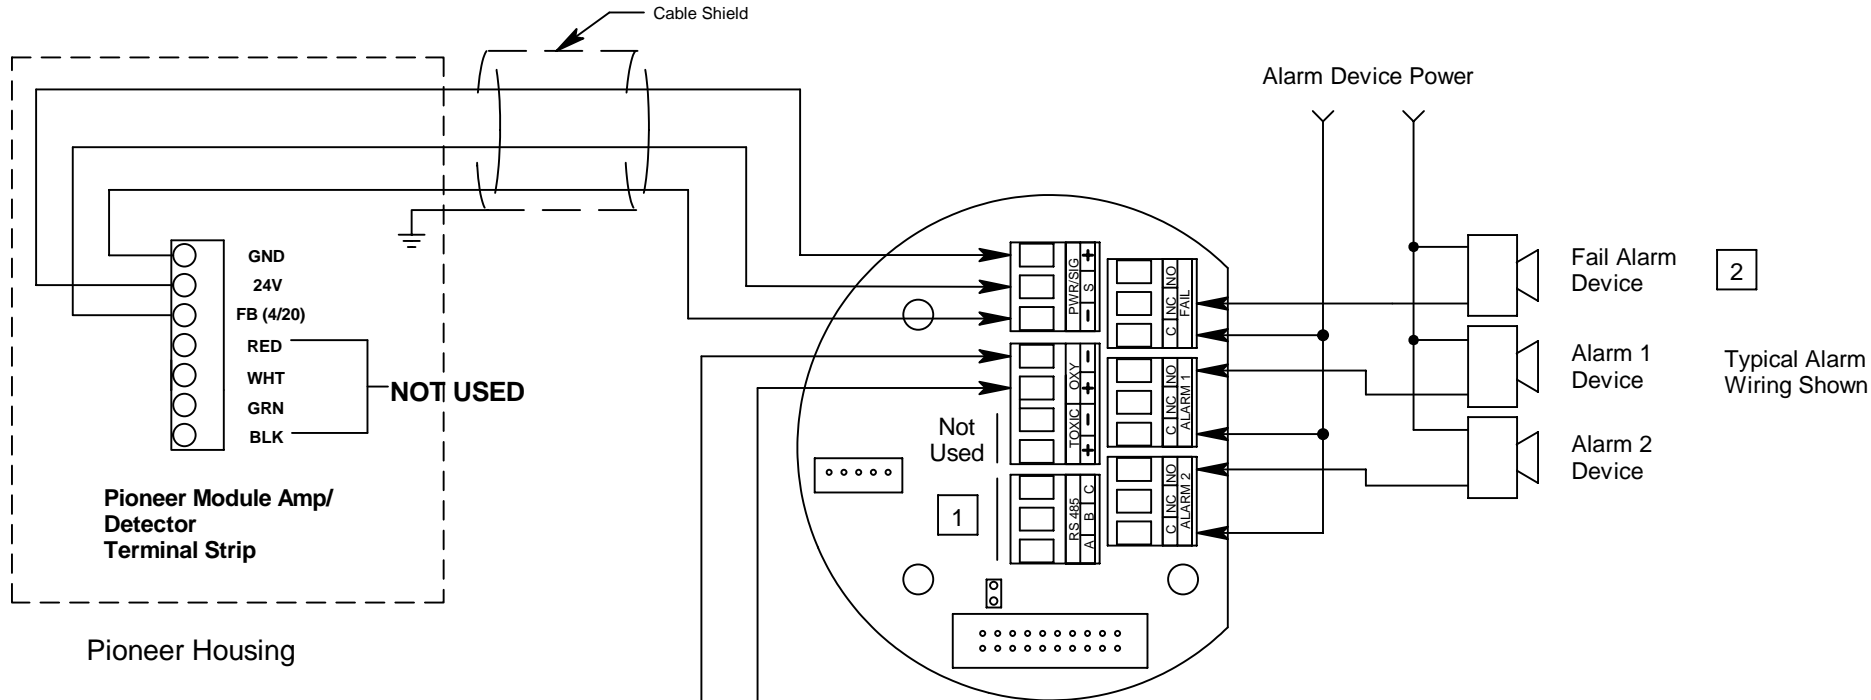

Notes

- 1** See drawing 65-2610RK-R10 for RS-485 wiring.
- 2** Each set of relay contacts rated for 5 amps 250 VAC resistive.

DO NOT SCALE DRAWING		All Dimensions In Inches Unless Otherwise Noted.	 RKI Instruments, Inc. www.rkiinstruments.com		
Deburr	Break Edges .010 R				
Tolerances & Finishes Unless Otherwise Noted: .XX ± .010 Angles ± 0° 30' .XXX ± .005 Conc. .010 TIR Fractions ± .015 Finish $\frac{125}{32}$		MATERIAL: N/A	TITLE: Wiring Diagram , M2, OXY, Capillary Type, to Pioneer, CSA Version		
Finish for O-ring Grooves, 3 Sides $\frac{32}{32}$		FINISH: N/A			
SCALE:None		A	DRAWN BY: GD	PART NUMBER: 65-2613RK-05-R05	REVISION: 0
		APPROVED BY:		DATE: 1/11/06	PAGE 1 OF 1