



| | | | |
|----|---------------------|---------|--|
| P1 | Preliminary Release | 11/9/05 | |
| 0 | ECR 60321-02 | 4/26/06 | |

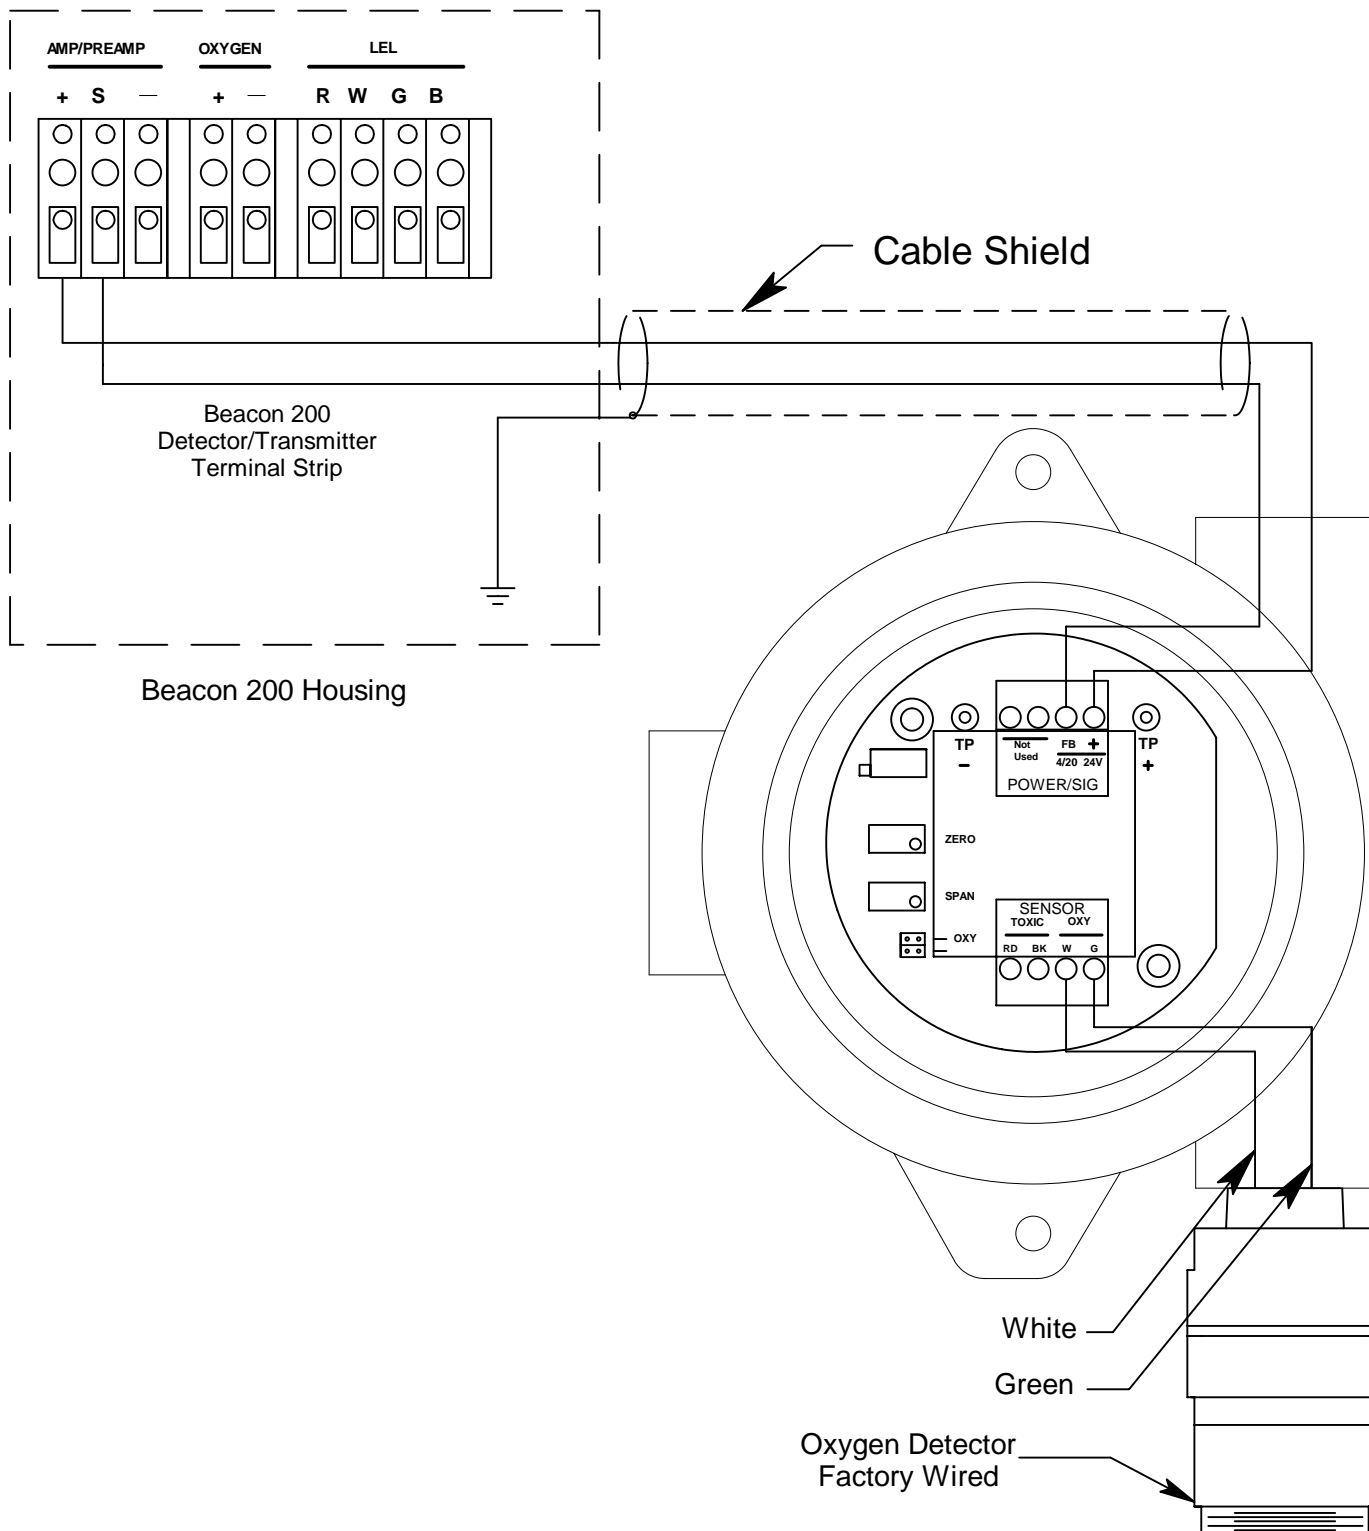

| | | | |
|---|--------------------|--|---|
| DO NOT SCALE DRAWING | |  RKI Instruments, Inc. www.rkiinstruments.com | |
| Deburr | Break Edges .010 R | | |
| Tolerances & Finishes Unless Otherwise Noted: .XX ± .010 Angles ± 0° 30' .XXX ± .005 Conc. .010 TIR Fractions ± .015 Finish 125/32 | | TITLE: Wiring Diagram, 65-2516RK Oxygen to Beacon 200 | |
| Finish for O-ring Grooves, 3 Sides 32/32 | | A DRAWN BY: CW/DJ APPROVED BY: MF | PART NUMBER: 65-2516RK-R03 DATE: 4/18/06 |
| SCALE: NONE | | REVISION: 0 | PAGE 1 OF 1 |