



P1	Preliminary Release	11/23/05	
0	Release per ECR 51129-01	12/16/05	

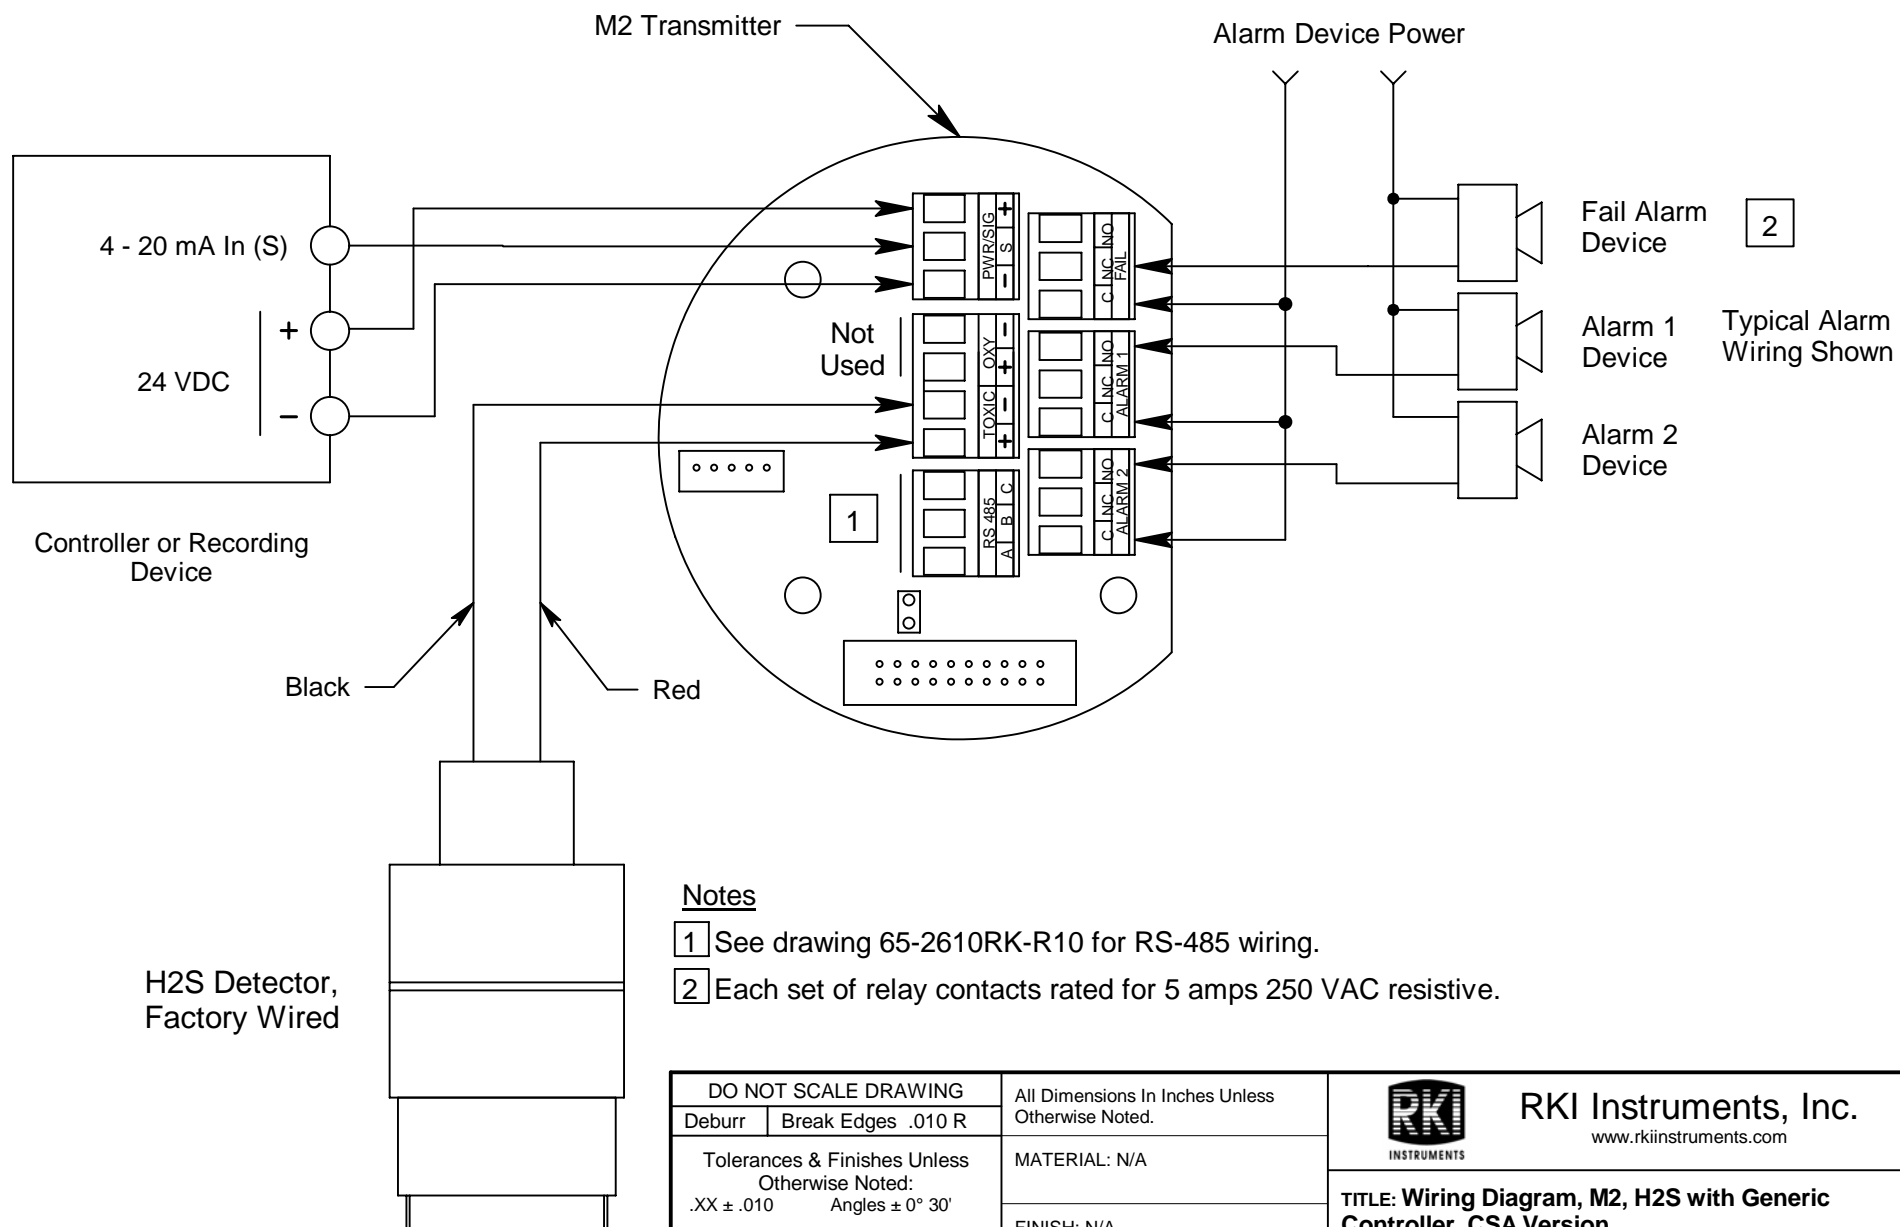

Notes

- 1 See drawing 65-2610RK-R10 for RS-485 wiring.
- 2 Each set of relay contacts rated for 5 amps 250 VAC resistive.

DO NOT SCALE DRAWING		All Dimensions In Inches Unless Otherwise Noted.		<div></div> <div>RKI Instruments, Inc. www.rkiinstruments.com</div>		
Deburr	Break Edges .010 R					
Tolerances & Finishes Unless Otherwise Noted: .XX ± .010 Angles ± 0° 30' .XXX ± .005 Conc. .010 TIR Fractions ± .015 Finish <div><div>125</div><div>✓</div></div>		MATERIAL: N/A		TITLE: Wiring Diagram, M2, H2S with Generic Controller, CSA Version		
Finish for O-ring Grooves, 3 Sides <div><div>32</div><div>✓</div></div>		FINISH: N/A				
SCALE:None		A		DRAWN BY: GD	PART NUMBER: 65-2615RK-05-R01	REVISION: 0
		APPROVED BY:			DATE: 11/23/05	PAGE 1 OF 1