



P1	Preliminary Release	10/25/04	
P2	See PDC # 41130-01	12/6/04	
0	Release per ECR 51129-01	12/16/05	

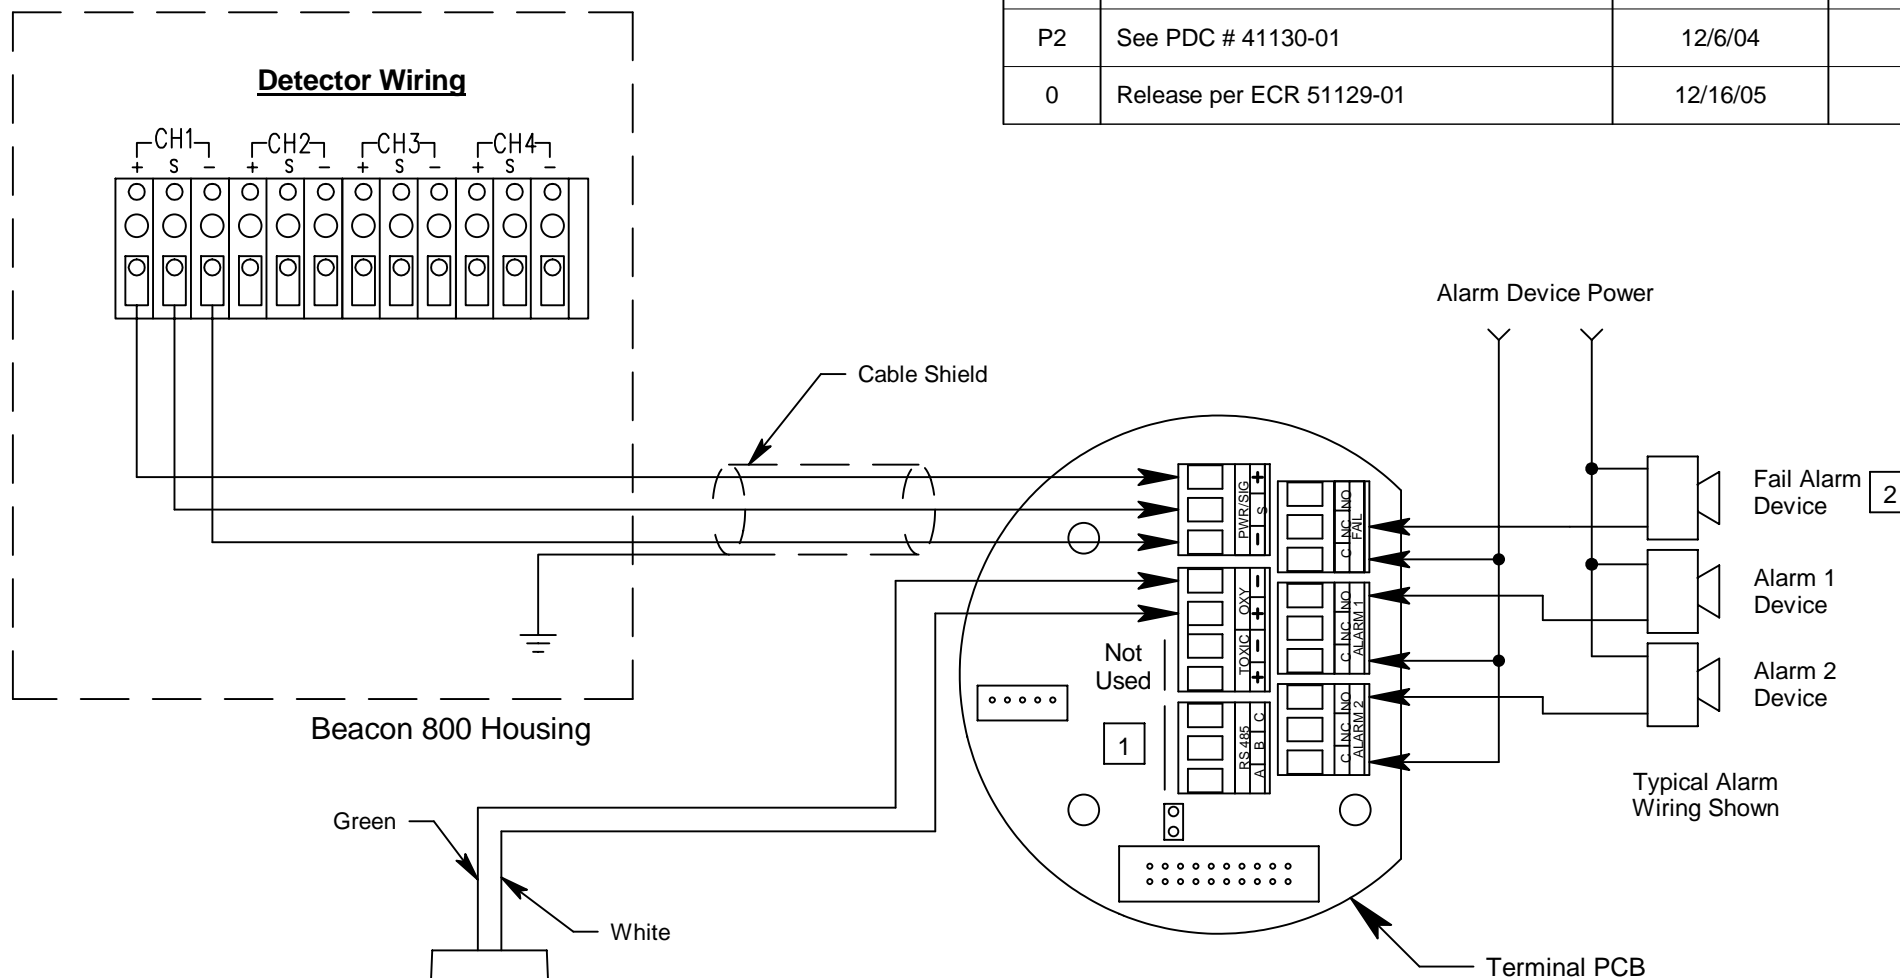

Notes

- 1 See drawing 65-2610RK-R10 for RS-485 wiring.
- 2 Each set of relay contacts rated for 5 amps 250 VAC resistive.

DO NOT SCALE DRAWING		All Dimensions In Inches Unless Otherwise Noted.		<div></div> <div>RKI Instruments, Inc.</div> <div>www.rkiinstruments.com</div>	
Deburr	Break Edges .010 R				
Tolerances & Finishes Unless Otherwise Noted:		MATERIAL: N/A		TITLE: Wiring Diagram , M2, OXY to Beacon 800	
.XX ± .010 Angles ± 0° 30'		FINISH: N/A			
.XXX ± .005 Conc. .010 TIR					
Fractions ± .015 Finish <div>125✓</div>					
Finish for O-ring Grooves, 3 Sides <div>32✓</div>		SCALE:None		APPROVED BY:	
				DATE: 10/25/04	
				PAGE 1 OF 1	
				REVISION: 0	
		A		DRAWN BY: CW	
				PART NUMBER: 65-2614RK-R04	