



P1	Preliminary Release	10/18/04	
P2	See PDC #41130-01	12/6/04	
0	Release per ECR 51129-01	12/16/05	

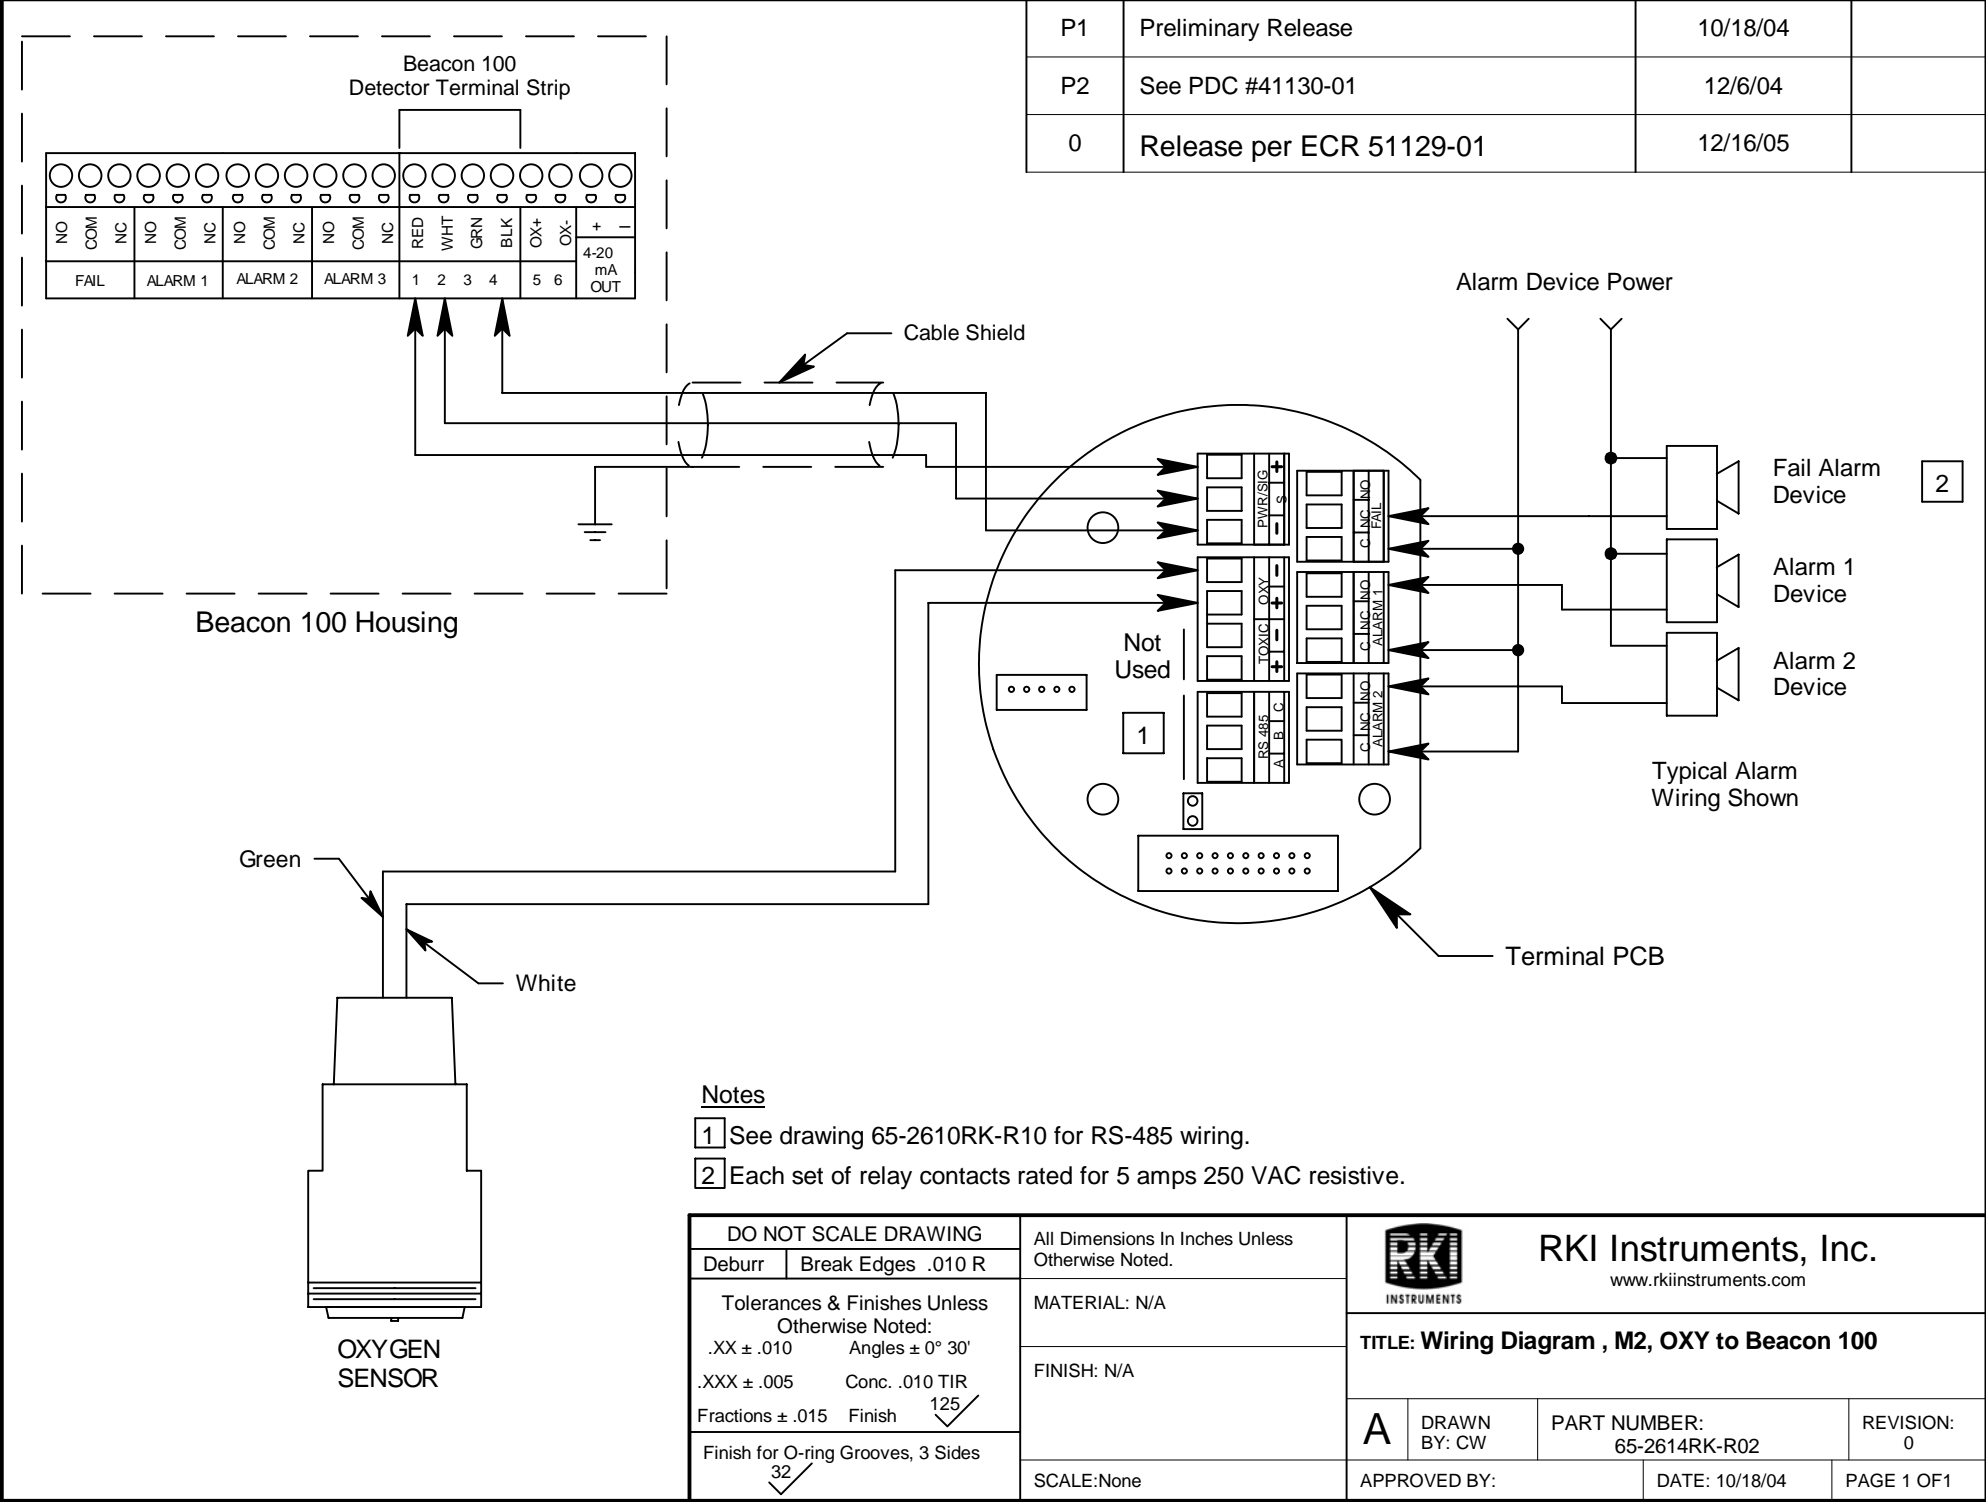

Notes

- 1 See drawing 65-2610RK-R10 for RS-485 wiring.
- 2 Each set of relay contacts rated for 5 amps 250 VAC resistive.

DO NOT SCALE DRAWING		 <div>RKI Instruments, Inc. www.rkiinstruments.com</div>			
Deburr	Break Edges .010 R				
Tolerances & Finishes Unless Otherwise Noted: .XX ± .010      Angles ± 0° 30' .XXX ± .005      Conc. .010 TIR Fractions ± .015      Finish <div>125✓</div>		MATERIAL: N/A			
Finish for O-ring Grooves, 3 Sides <div>32✓</div>		FINISH: N/A			
SCALE:None		TITLE: <b>Wiring Diagram , M2, OXY to Beacon 100</b>			
		A	DRAWN BY: CW	PART NUMBER: 65-2614RK-R02	REVISION: 0
		APPROVED BY:		DATE: 10/18/04	PAGE 1 OF 1