


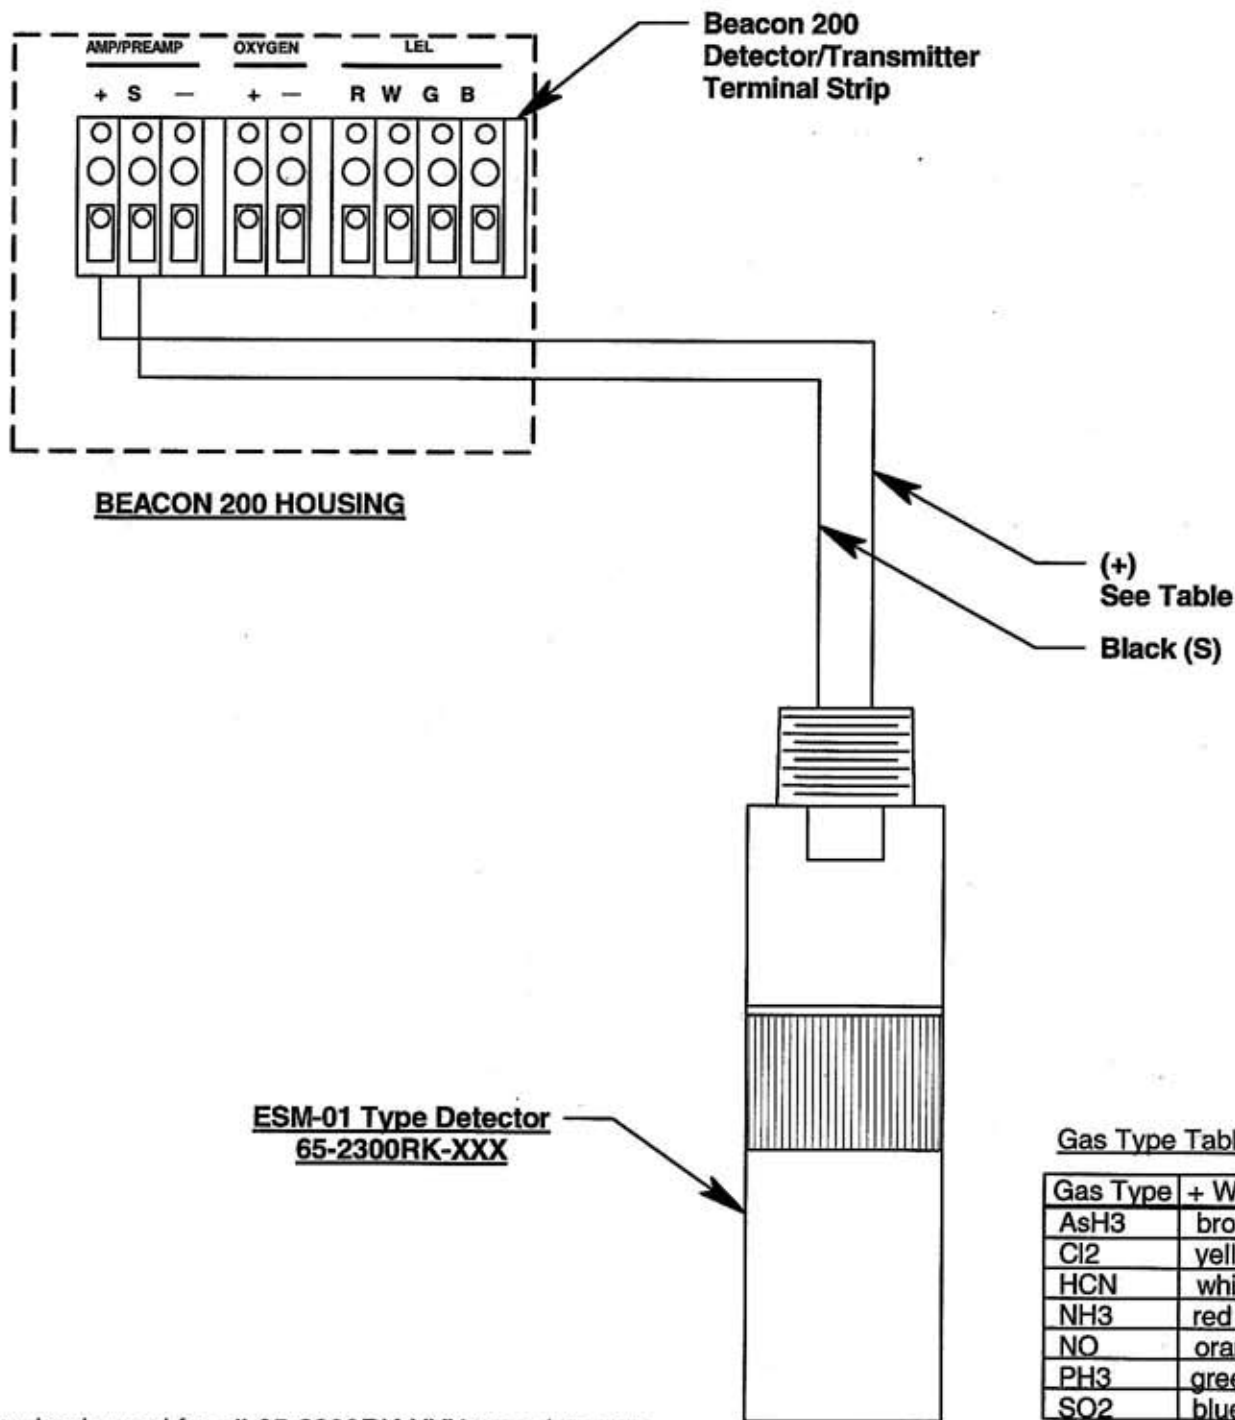




P2	PDC 080129-01	01/31/2008	
0	Released per ECR 080603-01	06/13/2008	
A	ECR 090630-01	07/14/2009	



Note:
This drawing is used for all 65-2300RK-XXX type detectors.

PROPRIETARY AND CONFIDENTIAL The information contained in this drawing is the sole property of RKI Instruments. Any reproduction in part or as a whole without the written permission of RKI Instruments is prohibited.	DO NOT SCALE DRAWING		All Dimensions in Inches Unless Otherwise Noted.		 RKI Instruments, Inc. www.rkiinstruments.com	
	Deburr	Break Edges .010 R				
	Tolerances & Finishes Unless Otherwise Noted:		FINISH: N/A			
	.XX ± .010	Angles ± 0° 30'			TITLE: WIRING DIAGRAM, 65-2300RK-XXX TO BEACON 200	
	.XXX ± .005	Conc. .010 TIR				
	Fractions ± .015	Finish 125✓				
Finish for O-ring Grooves, 3 Sides 32✓						
SCALE: NONE		A		DRAWN BY: GD	PART NUMBER: 65-2300RK-R04	REVISION: A
		APPROVED BY: 		DATE: 09/07/07		PAGE 1 OF 1