



P1	Preliminary Release	11/23/05	
0	Release per ECR 51129-01	12/16/05	

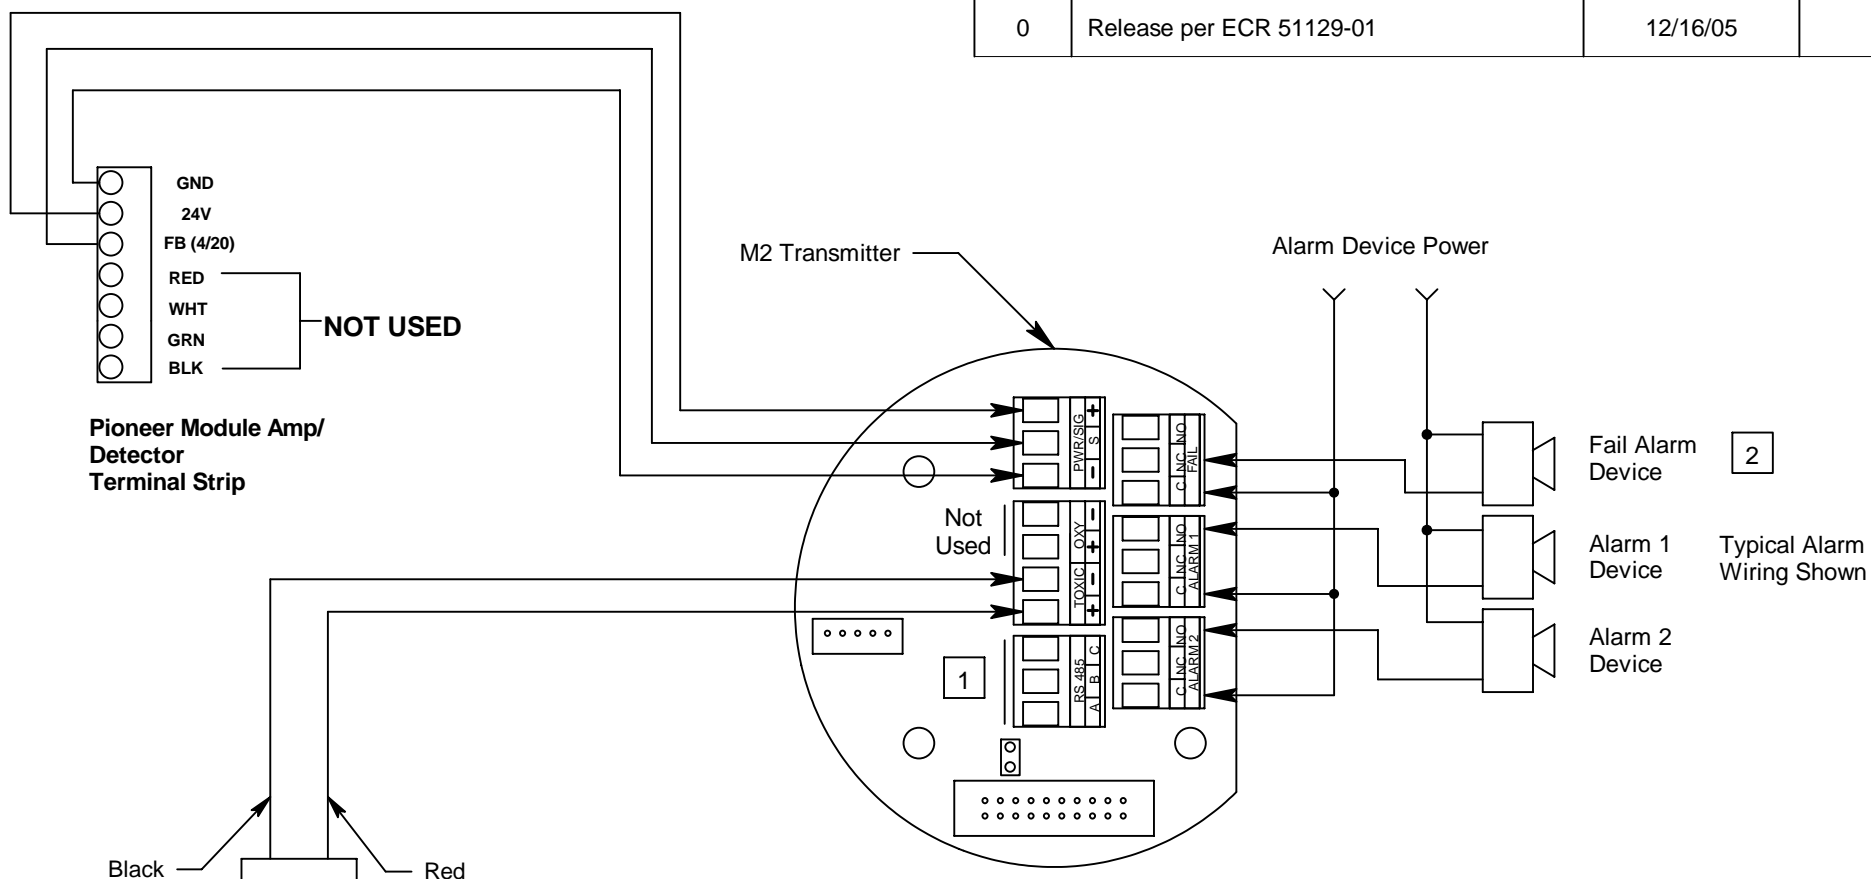

Notes

- 1 See drawing 65-2610RK-R10 for RS-485 wiring.
- 2 Each set of relay contacts rated for 5 amps 250 VAC resistive.

DO NOT SCALE DRAWING		All Dimensions In Inches Unless Otherwise Noted.		<div></div> <div>RKI Instruments, Inc.</div> <div>www.rkiinstruments.com</div>							
Deburr	Break Edges .010 R										
Tolerances & Finishes Unless Otherwise Noted:		MATERIAL: N/A		TITLE: Wiring Diagram, M2, CO to Pioneer, CSA Version							
.XX ± .010 Angles ± 0° 30'		FINISH: N/A									
.XXX ± .005 Conc. .010 TIR		SCALE:None		A		DRAWN BY: GD		PART NUMBER: 65-2616RK-05-R05		REVISION: 0	
Fractions ± .015 Finish 125✓				APPROVED BY:		DATE: 11/23/05		PAGE 1 OF 1			
Finish for O-ring Grooves, 3 Sides 32✓											

CO Detector,
Factory Wired