



P1	Preliminary Release	8/18/05	
0	Released per ECR 51129-01	12/16/05	

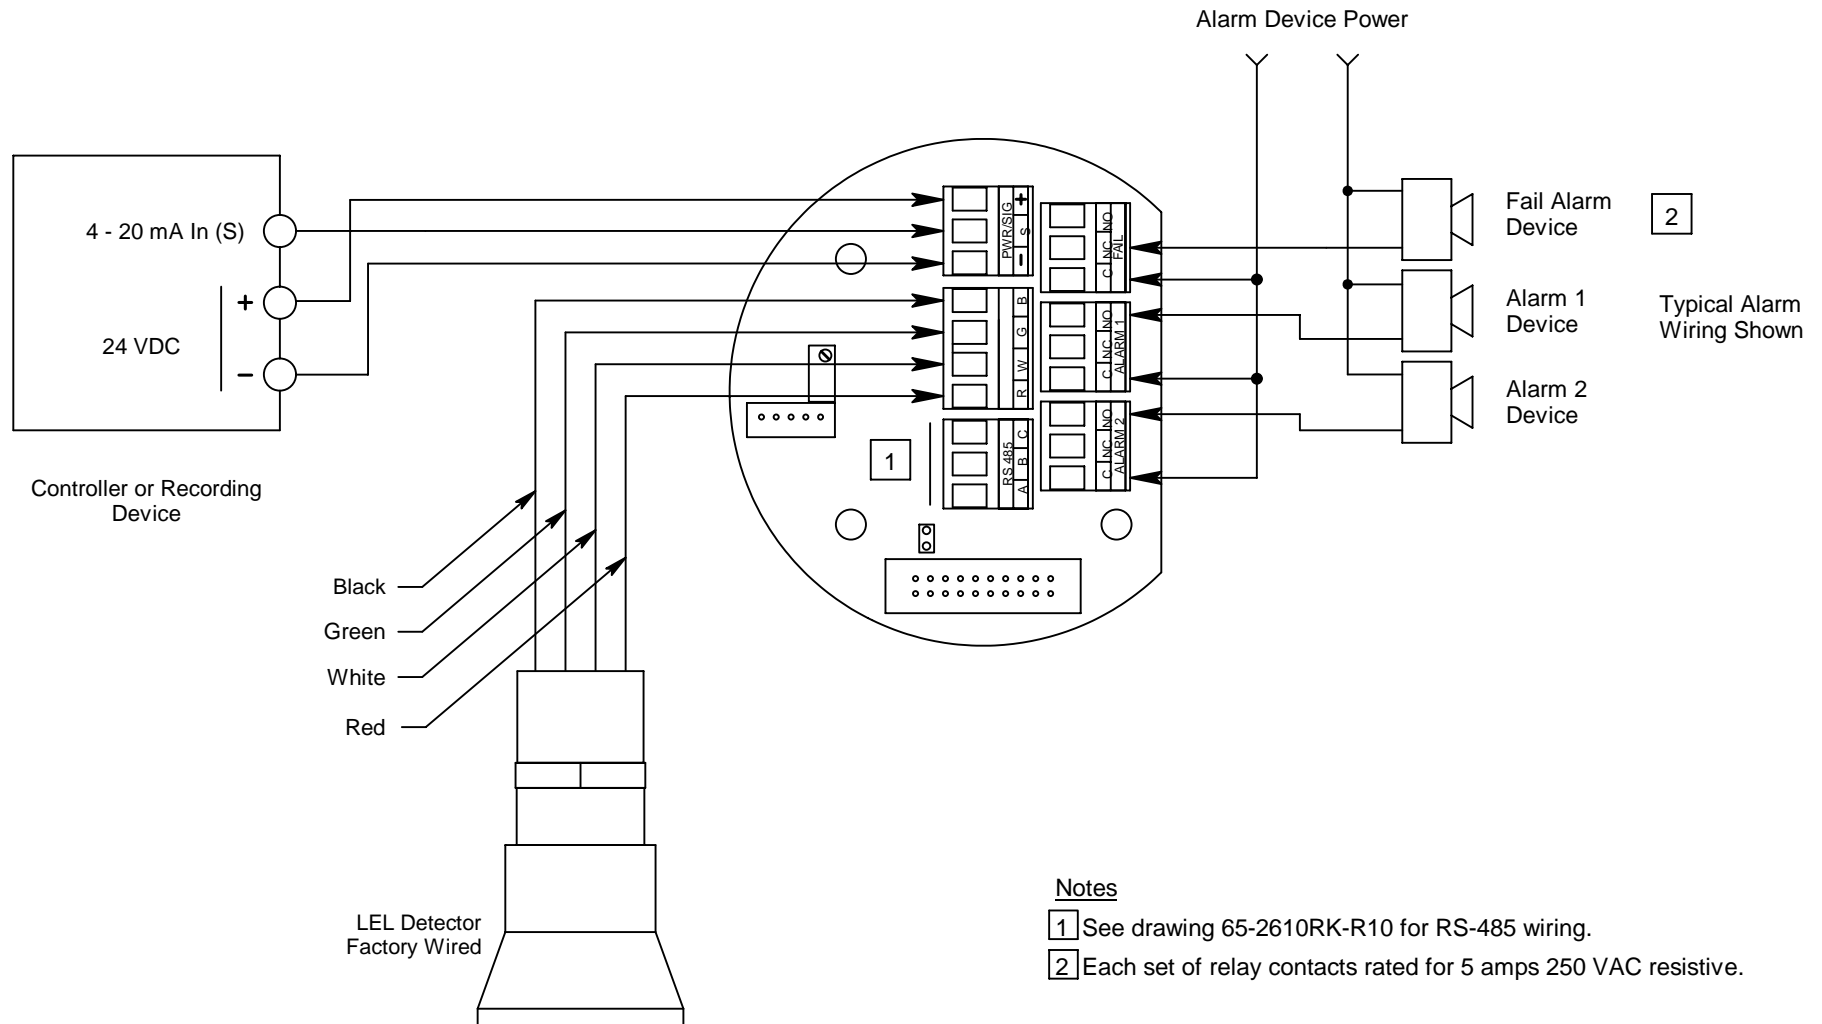

Notes

- 1 See drawing 65-2610RK-R10 for RS-485 wiring.
- 2 Each set of relay contacts rated for 5 amps 250 VAC resistive.

DO NOT SCALE DRAWING		All Dimensions In Inches Unless Otherwise Noted.		<div> INSTRUMENTS</div> <div>RKI Instruments, Inc.</div> <div>www.rkiinstruments.com</div>			
Deburr	Break Edges .010 R						
Tolerances & Finishes Unless Otherwise Noted: .XX ± .010 Angles ± 0° 30' .XXX ± .005 Conc. .010 TIR Fractions ± .015 Finish <div><div>125</div><div>✓</div></div>		MATERIAL: N/A		TITLE: Wiring Diagram , M2, H2 Specific LEL with Generic Controller			
FINISH: N/A							
Finish for O-ring Grooves, 3 Sides <div><div>32</div><div>✓</div></div>		SCALE:None		<div>A</div>	DRAWN BY: CW/DJ	PART NUMBER: 65-2611RK-R01	REVISION: 0
				APPROVED BY:		DATE: 8/18/05	PAGE 1 OF 1